


TRUNK RACK

BC-07510-3

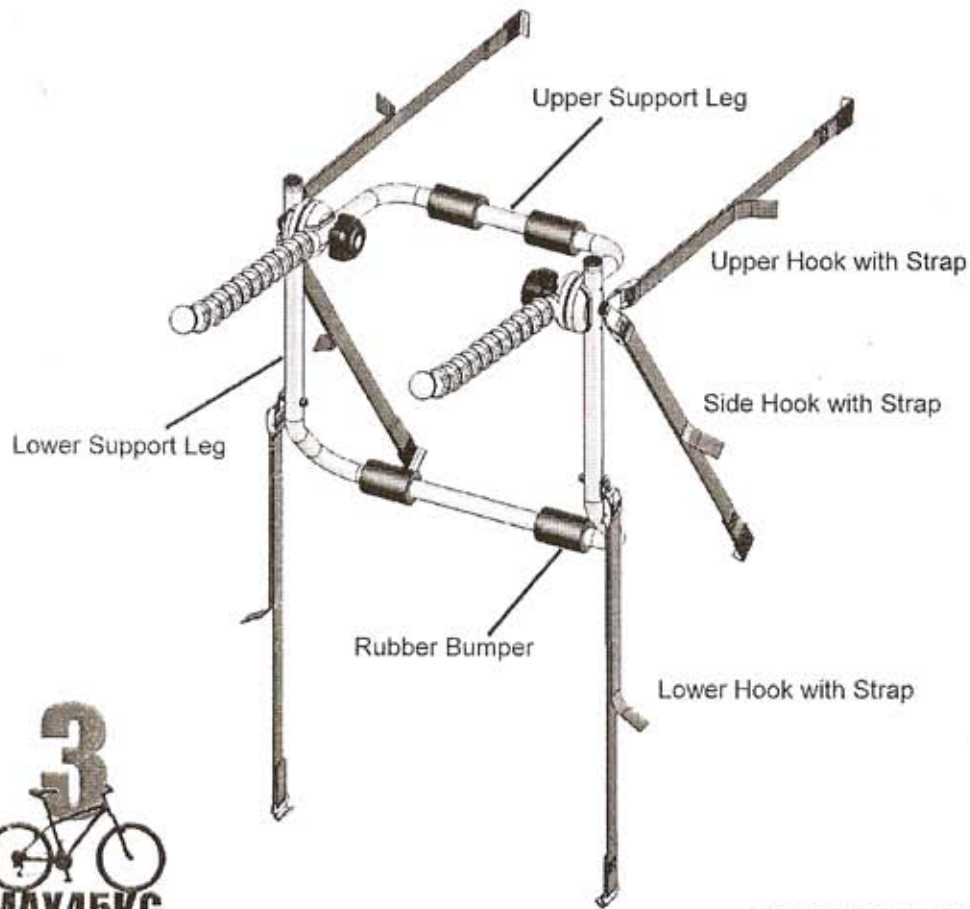

MADE IN TAIWAN

CAUTION

FOR SAFE AND PROPER USE OF YOUR TRUNK RACK :

1. Do not transport a bicycle which cannot be securely attached to the rack.
2. Keep bicycle tires clear of exhaust pipe. Hot exhaust can melt or burn bicycle tires.
3. Inspect your trunk rack before each use, both before and after loading bicycles.
Ensure all knobs, hooks and straps are installed properly and tightened securely.
4. Make sure all attachment hooks are attached to metal—not fiberglass, plastic or glass.
5. Replace damaged or worn attachment hooks or straps immediately.
6. Check security of all bikes and tightness of attachment straps at regular intervals during use, more frequently on bumpy roads, and immediately if the bicycles shift position.
7. Never exceed maximum bicycle limit or load limit listed in this owner's manual.
8. Do not attach rack to a trailer or to a vehicle being towed by another vehicle.
9. Reduce speed when driving on rough or unsurfaced roads.
10. Remove trunk rack from vehicle when not in use.

FEF1253PP0W9

STEP 1.

Choose the illustration that most closely approximates the installation of the Trunk Rack on your vehicle.



STEP 2.


Loosen the two adjustable hub assemblies by untightening the two knobs.



STEP 3.

Move the upper support leg until the Trunk Rack is set approximately to the same angle as in step 2 that closely resembles your vehicle. Hold the Trunk Rack in place to check for correct adjustment.

Only the upper support leg may rest on glass. Tighten the hubs by tightening the two knobs.

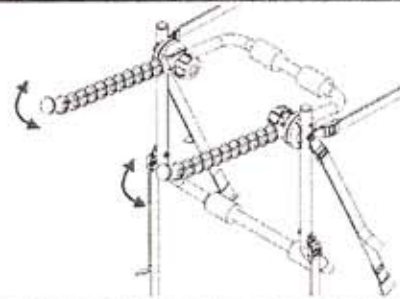

STEP 4.

The bike support arms should be angled slightly upward about 15°.

