


## Before you begin the installation of your BajaRack

Adjust the distance between the crossbars in your vehicle to 33" recommended, 19" minimum.

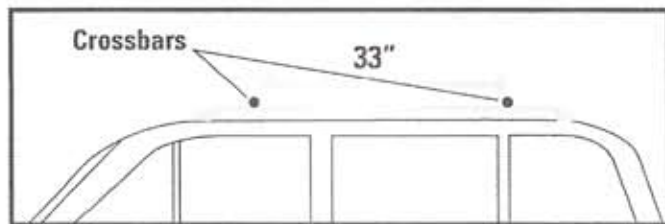

## Place your BajaRack on a table to install A & B brackets.

The brackets are pre-install to facilitate the racks assembly on the roof of the vehicle.



Position bracket A on the outside of the inner tubing.



Once the A bracket has been placed on top of the tubing take B bracket underneath and compress the frame. Insert the screw through the middle hole in bracket A and B, once the screw has past both brackets assemble the nut.

Repeat the same process for the rest.



## Installation of the rack on top of your vehicle

Place the BajaRack on top of your vehicle making sure the brackets are on top of the crossbars.



Once all four brackets have been installed, tighten the screw and nut with the Phillips screw driver and 5/16 wrench. Repeat the same process for the rest.



Place part C underneath the crossbar and align it with bracket A & B. Take 2 screws and pass them thru the holes of part A, B and C.



Take two knobs and place them on the screws and tighten them slightly



Make sure all 4 assembled brackets are seated correctly before doing the final tightening of the knobs.



Once your BajaRack has been installed in your vehicle push and pull side ways to see if it's secure. The rack should not slide.

## Tips and recommendations. (please read)

- It is recommended to install your BajaRack with the help of another person
- The load limit on your rack is 130 lb, please don't exceeded.
- You can use some accessories from other brands like Yakima® or Thule®.
- Tie down your gear with the supplied cargo net.
- Place your gear evenly on your rack.
- Your rack is just an accessory and it should not be used for vehicle protection against roll over's.