

Motorcycle Ramp Instructions

AF-9034HD / BW-9440-HD / BW-10840-HD


Series Ramps

⚠ Safety Warnings & Guidelines: ⚠


- To ensure safety and a long lasting Motorcycle Ramp(s), it is the users responsibility to read and follow all instructions.
- Keep these instructions with the Motorcycle Ramp(s) at all times and review before each use.
- It is the responsibility of the Motorcycle Ramp(s) owner to furnish the instructions to any person that borrows or purchases the Motorcycle Ramp(s).
- Always use good judgement and practice general motorcycle safety measures when using the Motorcycle Ramp(s).
- Before each use inspect the Motorcycle Ramp(s) making sure all parts are in safe working order and are in good condition free of structural defects.
- Clean the Motorcycle Ramp(s) and motorcycle of debris before loading and unloading the motorcycle.
- A helmet must be worn when loading and unloading vehicles using the Motorcycle Ramp(s).
- Store the Motorcycle Ramp(s) in a safe dry place.
- Never exceed the maximum weight limit displayed on the side of the Motorcycle Ramp(s).
- Never modify the Motorcycle Ramp(s) in any way.
- Never use the Motorcycle Ramp(s) on a unsafe or damaged tailgate, trailer, or other loading surface.
- Thoroughly inspect tailgate cables and ramp safety straps for cracks or fraying.

Motorcycle Ramp Assembly:

Outer Hinges:




1. Place bolt through hinge
2. Thread 3/4" nut on to bolt and tighten securely
3. Feed cotter pin through and spread cotter pin ends.



Center Hinges:

1. Place bolts through both center hinges
2. Thread 3/4" nut on to bolt and tighten securely

Included Parts:

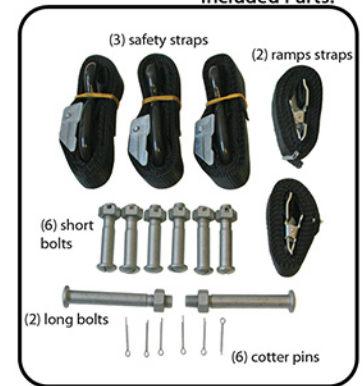

Loading & Unloading:

Loading:

1. Park the vehicle and/or trailer on level, hard terrain.
2. Set the parking brake on the vehicle. If loading onto a trailer make sure the trailer is properly hitched to the vehicle and level.
3. Rest the Motorcycle Ramp(s) attaching fingers/plate onto the edge of the tailgate or trailer. Make sure the Motorcycle Ramp is tight up against the loading surface, centered on the loading surface, resting on hard-level ground, and is at the lowest angle possible.
4. Loop included safety straps around the main support rail of the Motorcycle Ramp(s) approximately 2-3' from the tip of the Motorcycle Ramp(s). Attach the other end of the safety strap to a secure spot on the underside of the vehicle (i.e. steel bumper, receiver hitch). Pull safety straps tight to remove slack. (see example pictures on next page)
5. Always have a second adult person to spot for the rider while loading. Never allow a child to spot for the motorcycle rider and never stand in the path of the motorcycle.
6. Wearing a helmet, drive the motorcycle up the Motorcycle Ramp(s) in a slow, smooth, constant motion. NEVER OVER-ACCELERATE OR STOP IN THE MIDDLE OF THE RAMPS.
7. Once loaded, set the brake on the motorcycle and secure with tie-downs.
8. Remove the safety straps and Motorcycle Ramp(s) and store away.

Unloading:

1. Repeat steps 1-5 from above.
2. Wearing a helmet, back the motorcycle slowly down the Motorcycle Ramp(s). Using only the brake slowly descend the ramp until the motorcycle is fully off the Motorcycle Ramp(s).
3. Remove the safety straps and Motorcycle Ramp(s) and store away.

Motorcycle Ramp Instructions

AF-9034HD / BW-9440-HD / BW-10840-HD

Series Ramps

Proper Safety Strap Usage:

1. Loop the safety strap around the main rail of the ramp approximately 2-3' from the tip of the Motorcycle Ramp(s). Loop S-hook through loop end.
2. Pull the safety strap tight, cinching the loop around the ramp main tube. Feed the strap underneath the ramp.




3. Hook the other end of the safety straps to a secure (non-plastic) point on the back of the vehicle. Pull tight to remove slack.

Bumper Tie Down Point



Hitch Chain Loop Tie Down Point

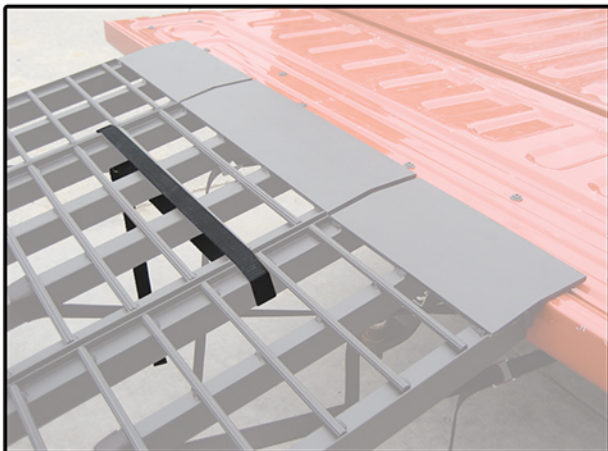

4. 2 ramp straps can be wrapped around the top and bottom of the ramps to keep together when folding.