

REMOVABLE WHEEL CHOCK INSTRUCTIONS

MC-CH-3.5 MC-CH-5.5 MC-CH-6.5

SURFACE MOUNTING INSTRUCTIONS

STEP 1. REMOVE ALL PARTS & HARDWARE FROM PACKAGE

STEP 2. WITH WHEEL CHOCK IN UPRIGHT POSITION, PLACE THE STEEL THREADED STUDS (D), FROM THE BOTTOM-UP, INTO THE BACK HOLES OF THE CHOCK. SECURE FROM THE TOP WITH 1/4" X 5/8" SCREWS (E). REPEAT WITH OTHER STUD. (ILLUSTRATION ON BACK)

STEP 3. TO INSTALL MOUNTING HARDWARE, PLACE THE WHEEL CHOCK ON THE FLOOR IN ITS APPROPRIATE POSITION. TRACE AROUND THE TWO THREADED STUDS (D). MAKE SURE THE LOCATION ALLOWS ENOUGH ROOM FOR THE BIKE AND SECURING STRAPS.

STEP 4. FIND THE RIGHT PLACEMENT OF HOLES BY PLACING THE MOUNTING PLATES (B+C) OVER THE MARKS ON THE FLOOR AND MARK THEN DRILL 4 HOLES USING A 1/4" DRILL BIT

STEP 5. MOUNTING HARDWARE INSTALLATION:


LAY THE SPACER PLATES (B) DOWN ON THE DECK OF THE TRUCK / TRAILER FLOOR FOLLOWED BY THE SLOTTED MOUNTING PLATES (C) ON TOP OF (B). SECURE THEM WITH THE 2" SCREWS (F). (MAKE SURE THE ROUND HOLE ON THE SLOTTED MOUNTING PLATE (C) IS TOWARDS THE REAR OF THE VEHICLE SO THAT THE CHOCK IS SECURED WHEN SLID FORWARD)

FROM UNDERNEATH THE FLOOR SECURE THE 2" SCREWS (F) WITH WASHERS (G) & LOCK NUTS (H). TIGHTEN SCREWS (F) & REPEAT FOR OTHER PLATES (ILLUSTRATION ON BACK)

STEP 6. WITH HARDWARE SECURELY IN PLACE, SLIDE THE WHEEL CHOCK INTO THE MOUNTING PLATES (B & C). *NOTE - THE WHEEL CHOCK IS LOCKED INTO PLACE WITH THE BIKE TIRE IS IN THE CHOCK & TIE DOWN STRAPS PULLING THE BIKE TOWARD THE FRONT OF THE TRAILER.

PARTS LIST

- A. WHEEL CHOCK
- B. (2) SPACER MOUNTING PLATES
- C. (2) SLOTTED MOUNTING PLATES
- D. (2) STEEL THREADED STUDS
- E. (2) 1/4" X 5/8" SCREWS
- F. (4) 2" SCREWS
- G. (4) WASHERS
- H. (4) LOCKING NUTS

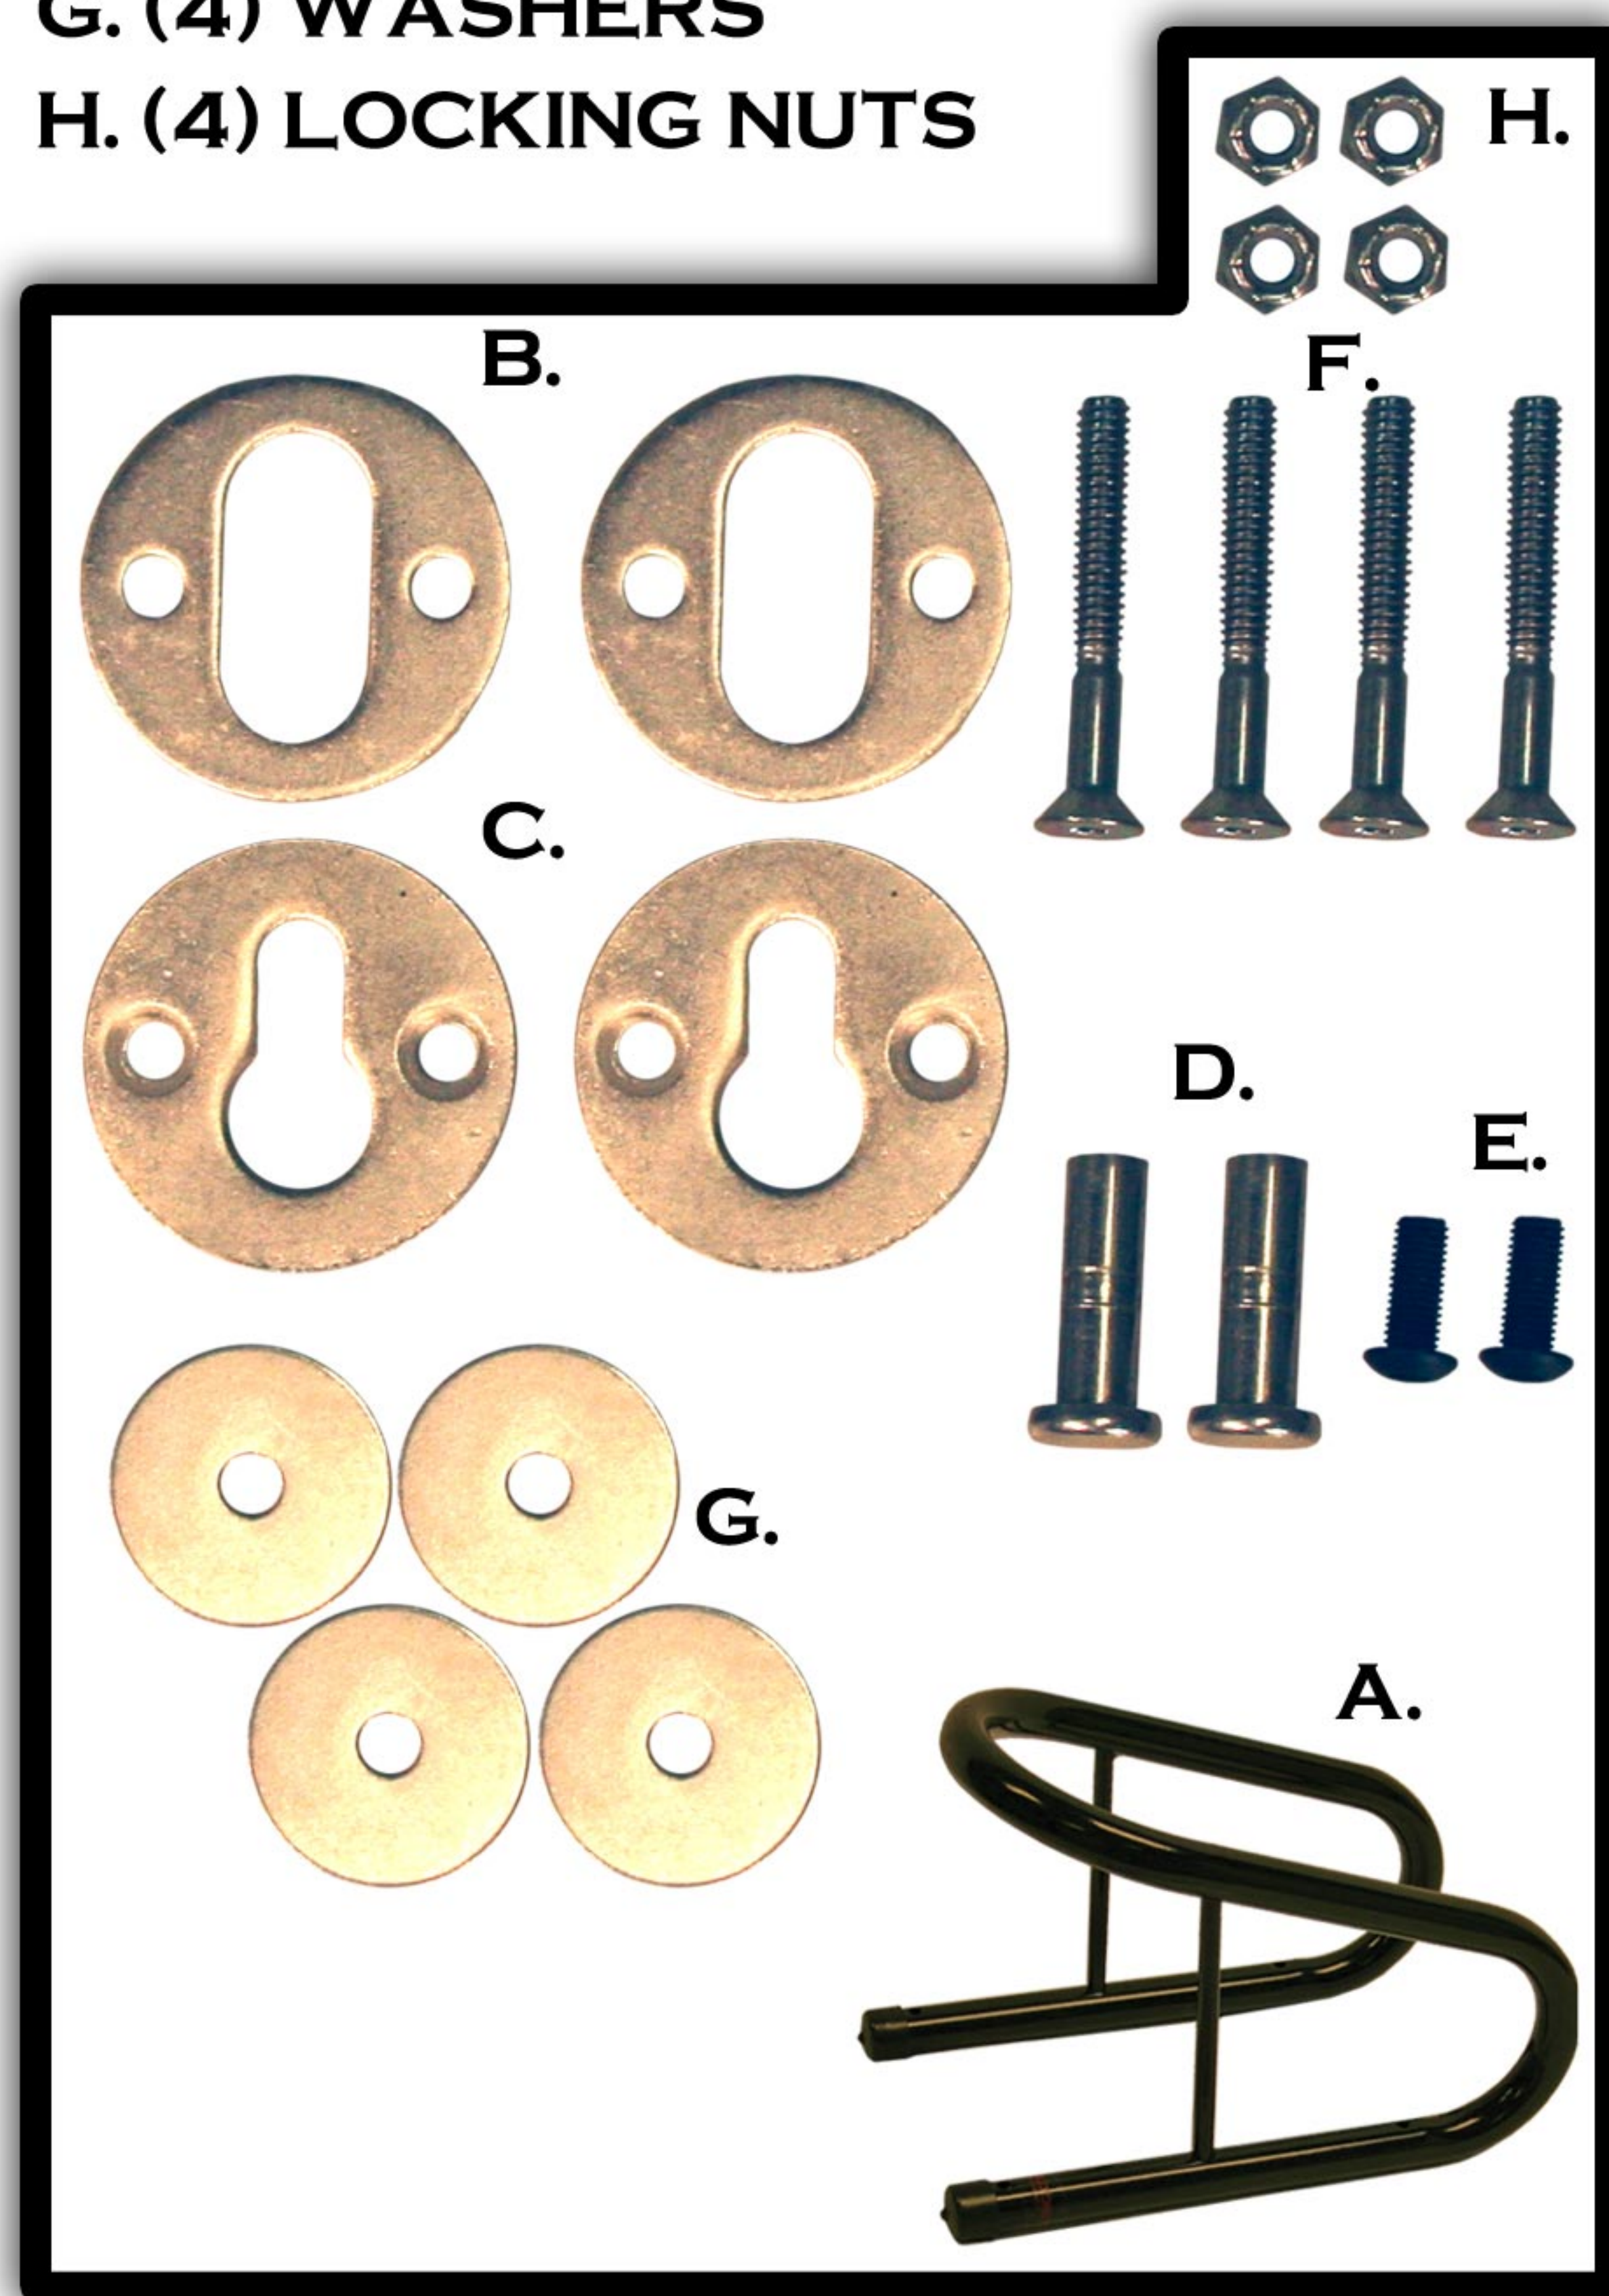

1 - 800 - 851 - 6396


575 W. HIGH ST AURORA, MO 65605

WWW.RAGEPOWERSPORTS.COM


REMOVABLE WHEEL CHOCK INSTRUCTIONS

MC-CH-3.5 MC-CH-5.5 MC-CH-6.5

STEP 2 ILLUSTRATION

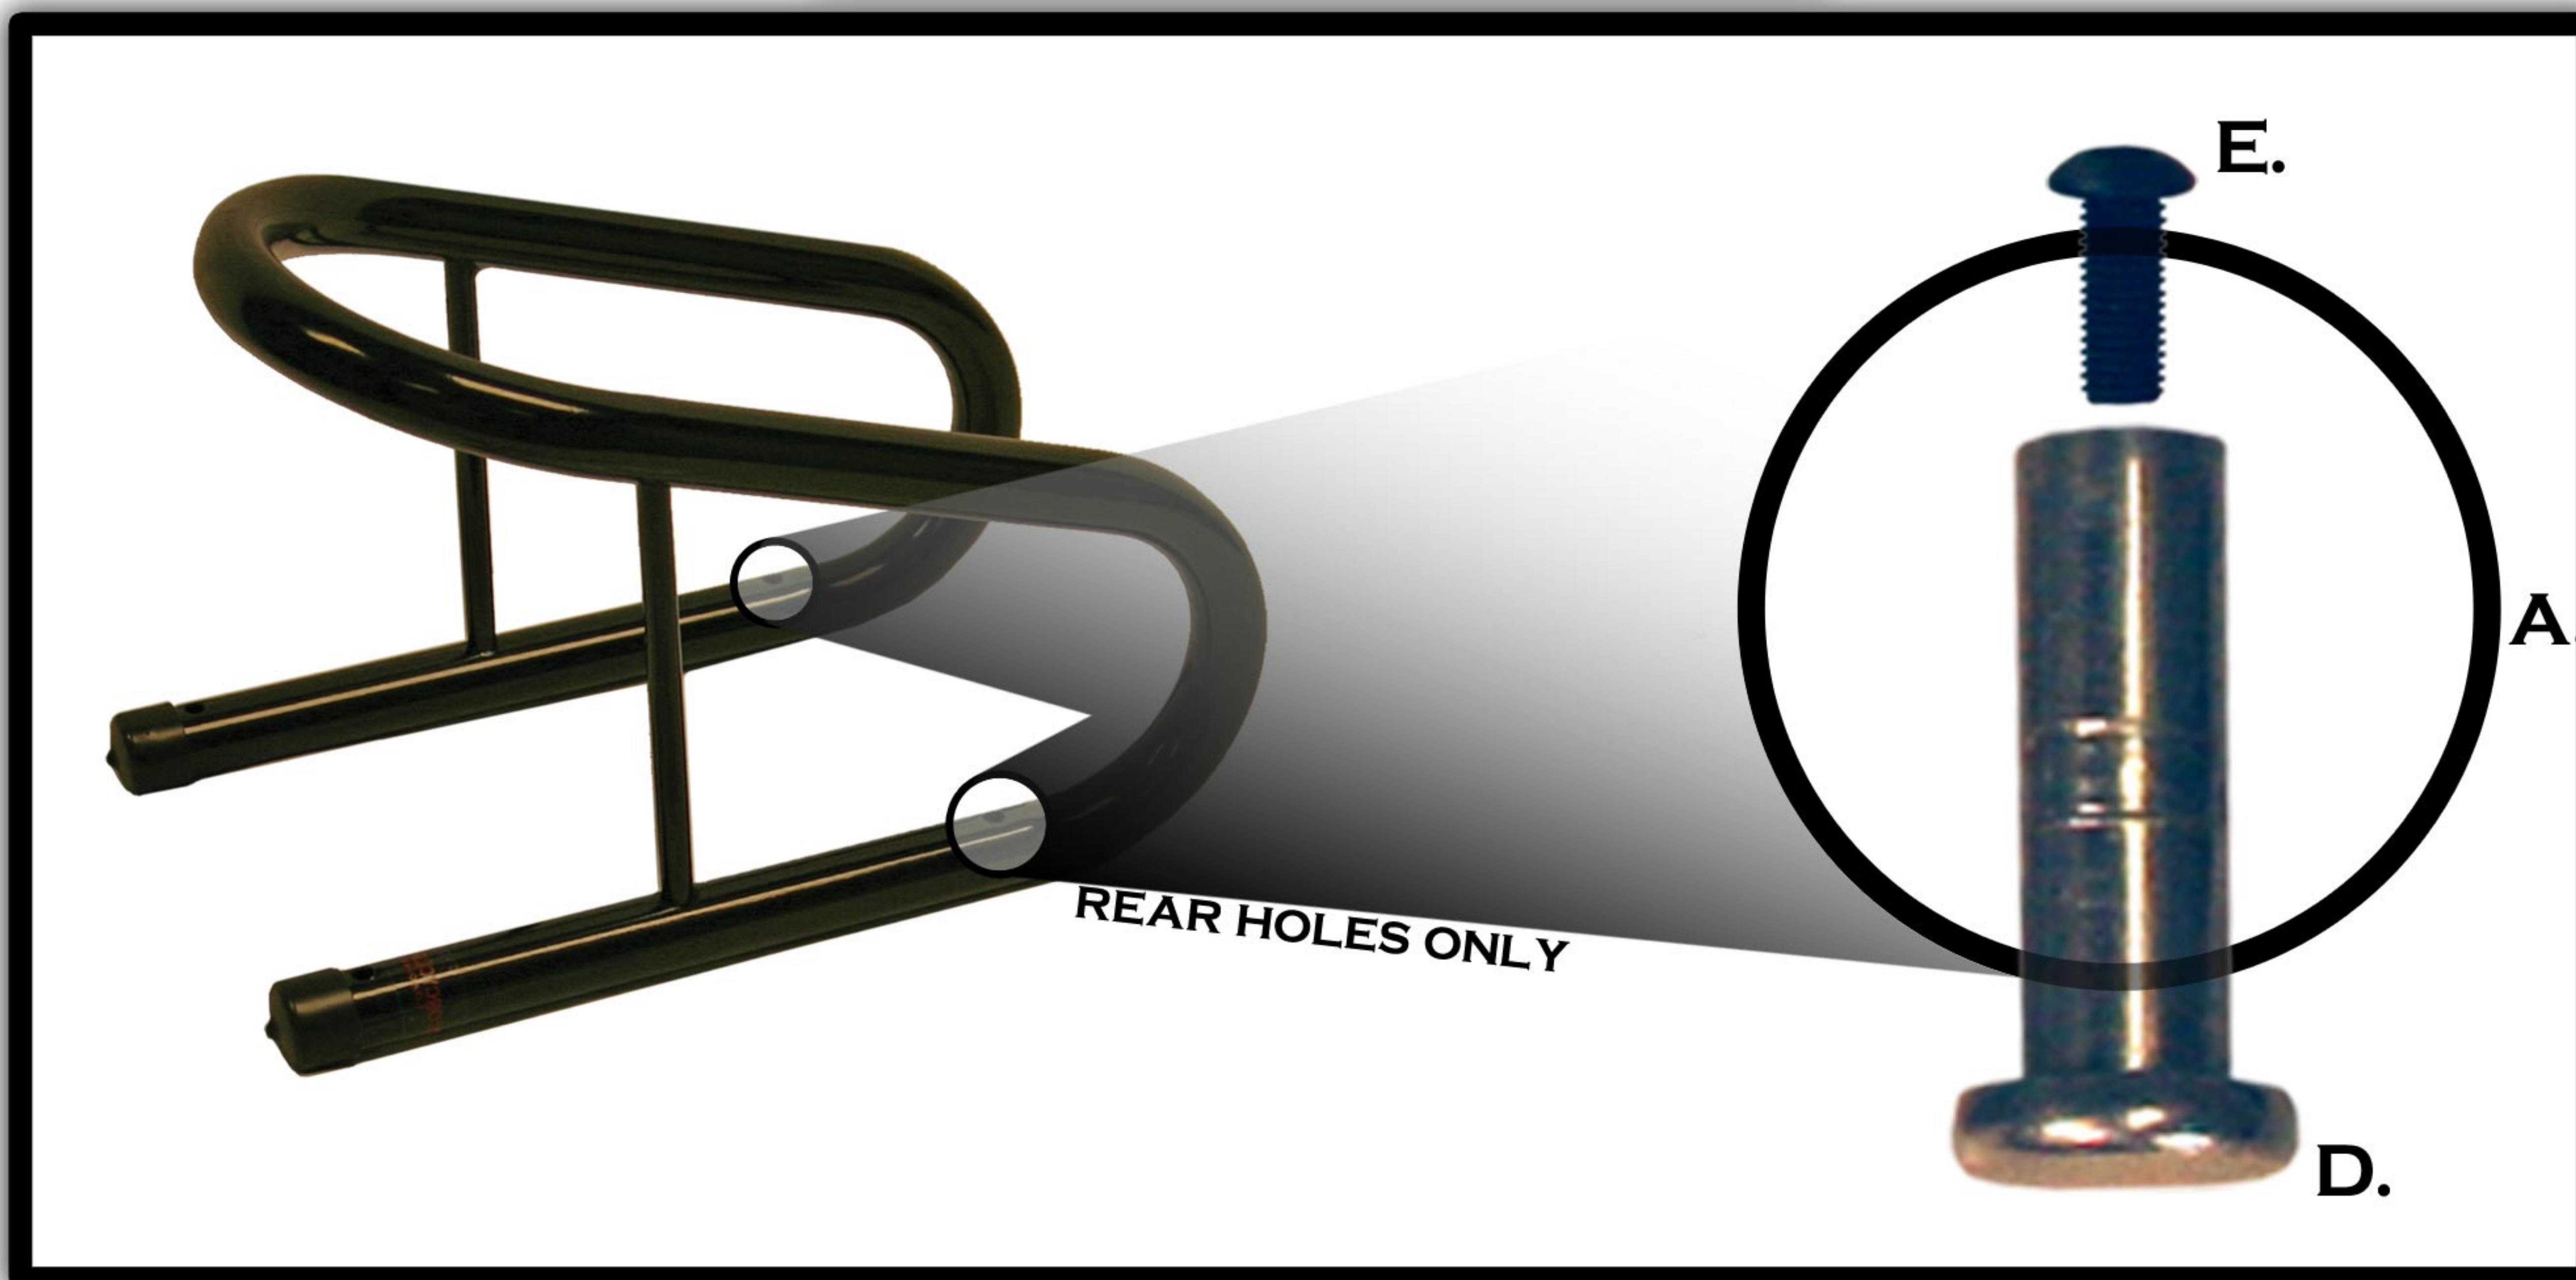

STEP 5 ILLUSTRATION

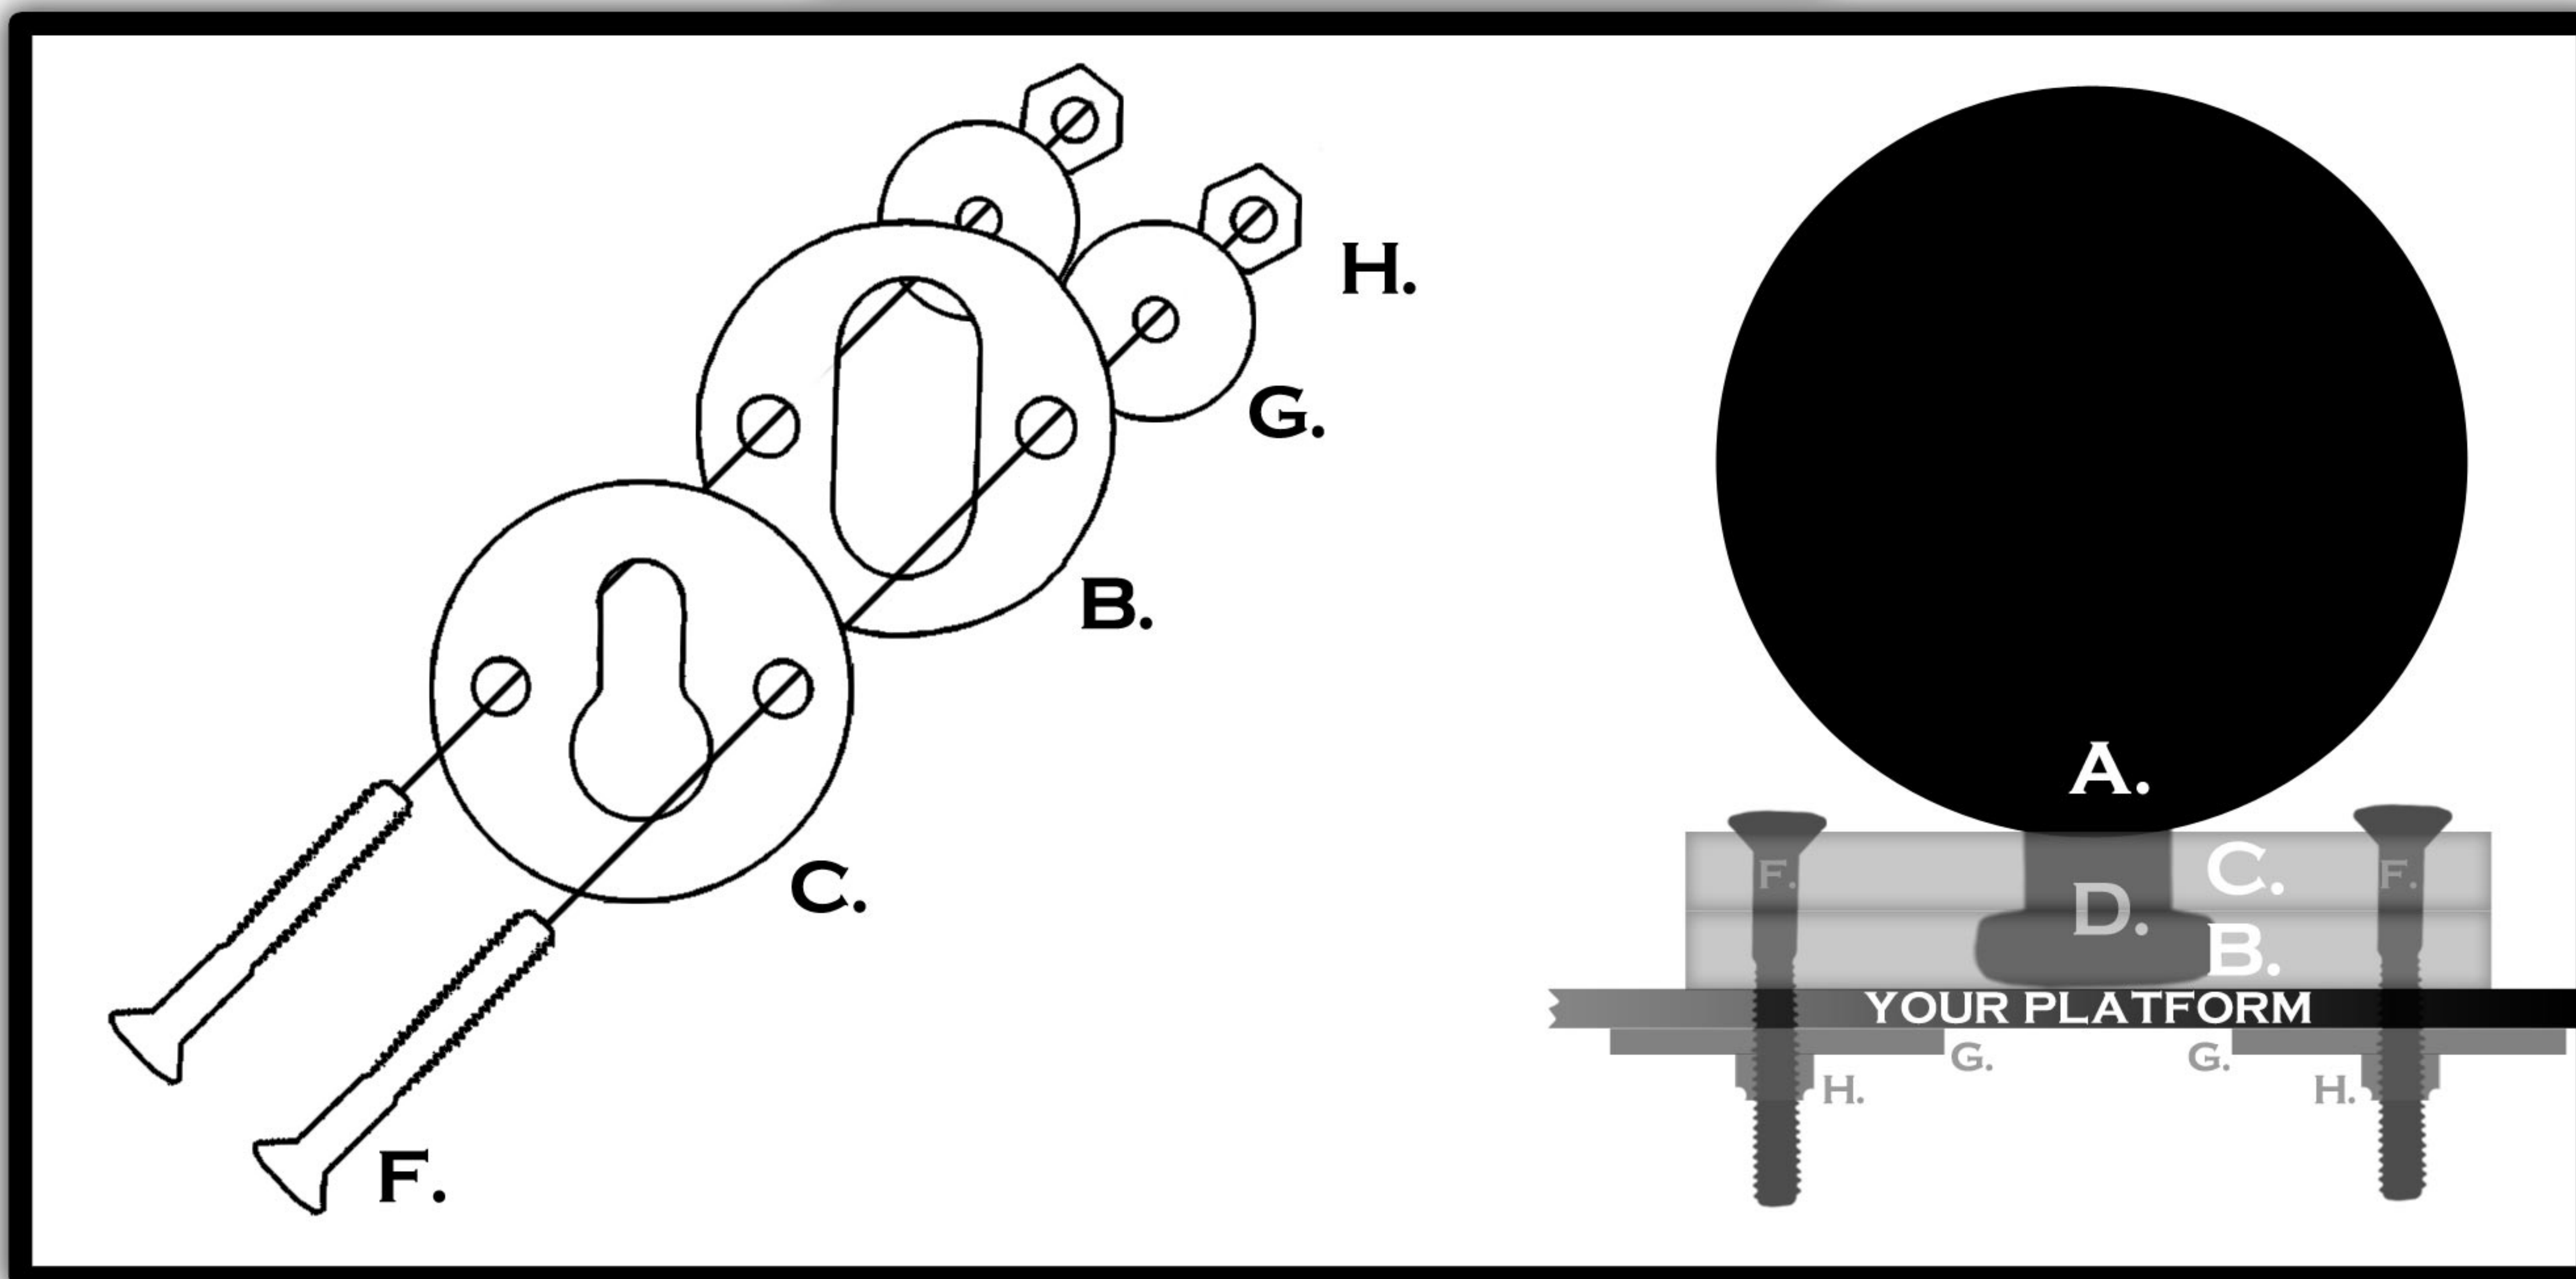

1 - 800 - 851 - 6396

575 W. HIGH ST AURORA, MO 65605

WWW.RAGEPOWERSPORTS.COM