


3. To reel off the upper joint, push down the handspike.
4. Pull up both side locks.
5. Fold the pet stroller.
6. Secure the side safety lock.

Cleaning



1. Take out the handle rod from the half-round rod.

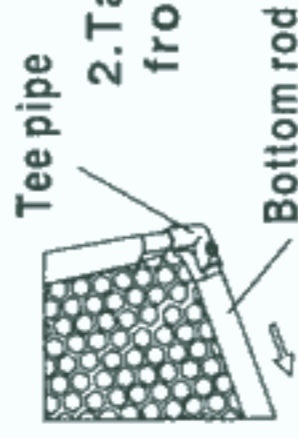

2. Take out the bottom rod from the tee pipe.



3. Take out the filler plate from the bottom of the cloth hood.
4. Clean the cloth hood in soft cleanser, dry in natural air.

PACKING LIST

No.	PARTS NAME	QTY.
1	Main frame	1
2	Front wheels	2
3	Rear wheels component	1
4	Canopy body	2
5	Sponge cushion	2
6	Handle rod	2
7	Bottom rod	4
8	Use instruction	1

WARNING:

For the safety your pet, please read the following and keep for future reference.




Caution

1. Do not lift up the stroller when the pet is in.
2. Never use the stroller on uneven place.
3. Never use the stroller near the fire or other dangerous area.
4. Must use the brakes when you stop moving your stroller.
5. Do not put two or more than two pets in one stroller.
6. Do not store or use this stroller in areas exposed to high or low temperature or humidity for a long time.
7. Maximum pet weight for this strollers 18kgs.

PET STROLLER

USE INSTRUCTION

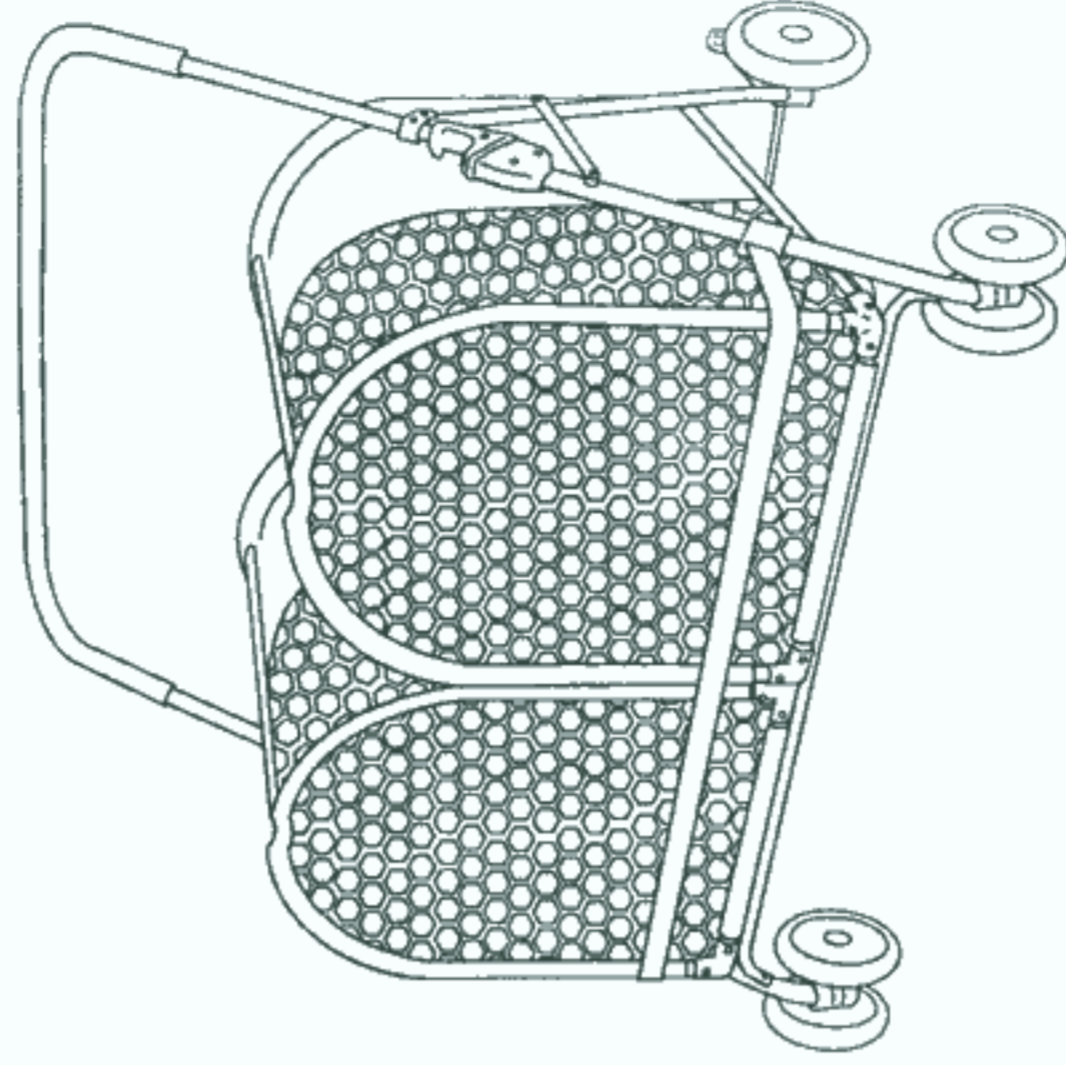

LIGHT AND SMALL, EASY TO CARRY

IMPORTANT


BEFORE ASSEMBLING THIS PET STROLLER RE

DO NOT USE THIS STROLLER IF ANY PART IS BROKEN OR MISSING
KEEP THESE INSTRUCTIONS IN A SAFE PLACE FOR FUTURE REFERENCE

Maintenance


Important: read these instructions carefully and keep it for future reference. The correct use and maintenance of this product is essential.

PARTS

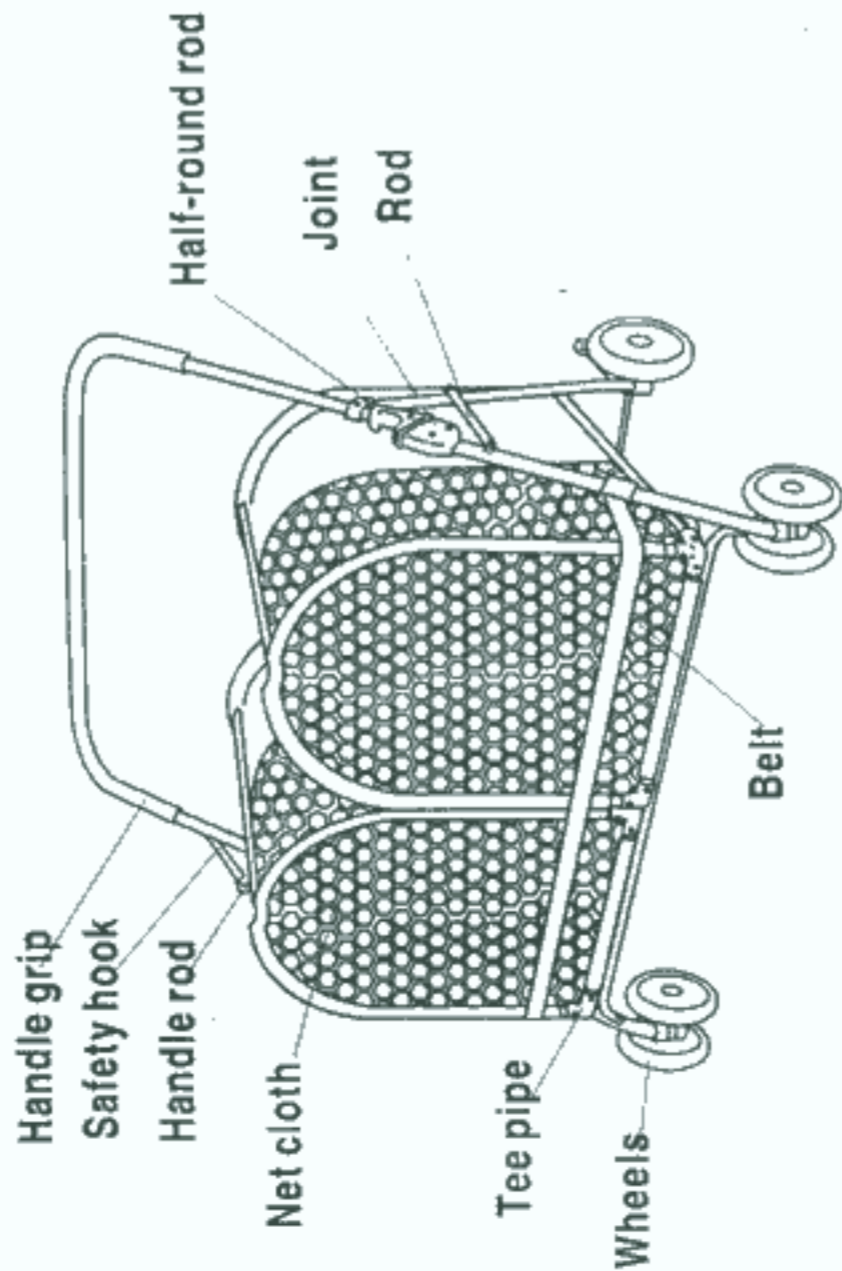


Operation Instruction

1. Unfold: release the folding hooks, lift up the handle with one hand. The pull back to unfold the frame until stator impinge on it's position, hook the bolt. Then hook with the safety hook.

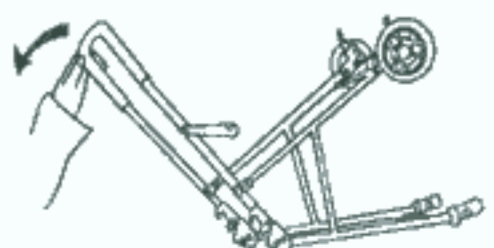


2. Assemble the front wheels: as the arrowhead shows, insert the front wheels assembly onto the front wheel frame until the locking button of the front wheel frame spring out.

locking button

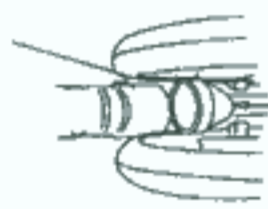

(To disassemble: press the locking button down and remove the assembly.)

3. Attach the entire assembly onto the frame by inserting the stroller leg into the wheel assembly until locked in place.

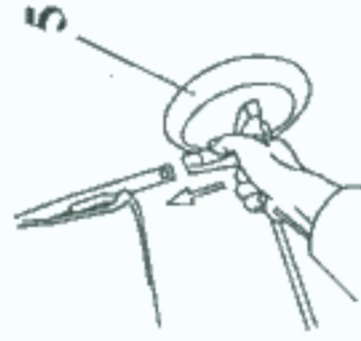


4. Take out the cloth hood, insert the right and left long bottom rod into the Tee pipe, it is a must to make the inner card spring pop up out of the fixing hole for the Tee unit.

Tee pipe



5. Insert the hand rod into the openings at the cloth hood for front and rear half-round rod.


Hand rod

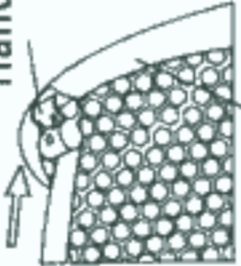

Half-round rod

6. Tie the front and rear buckle on the wagon body to the support rod of wagon carrier.

Wagon body

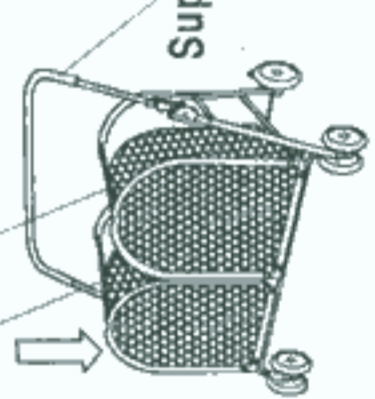

Support rod

7. pass the polypropylene fiber belt on the two sides through the fixing belt of the cloth hood, then fasten the 4-way assembly buckle to fix the wagon body.



Brakes




As shows, step down the brake levers on both sides to lock the rear wheels.

Pucker



1. To undo the front fixed belt and the back fixed belt.

Wagon body

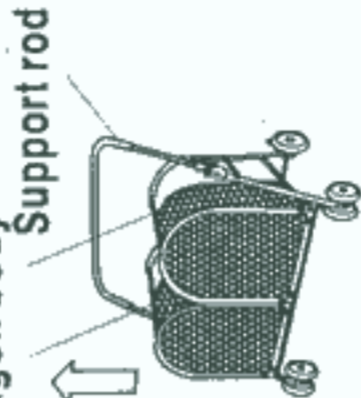

Support rod

2. Take down the wagon body from the support rod, then the wagon body as a pet house.

Handle grip




3. To reel off the upper joint, push down the handspike.



Up joint

Safety hook

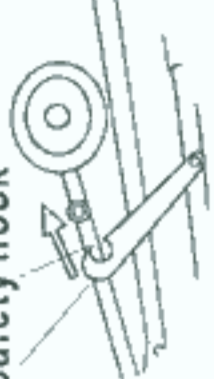

4. To pucker then to fasten the safety hook. then the pet stroller was puckered.