


Folding doggydocks™

STABILIZER BARS

Attach to side of board
Center on each side of hinge
Tap into place until it fits flush
against the board

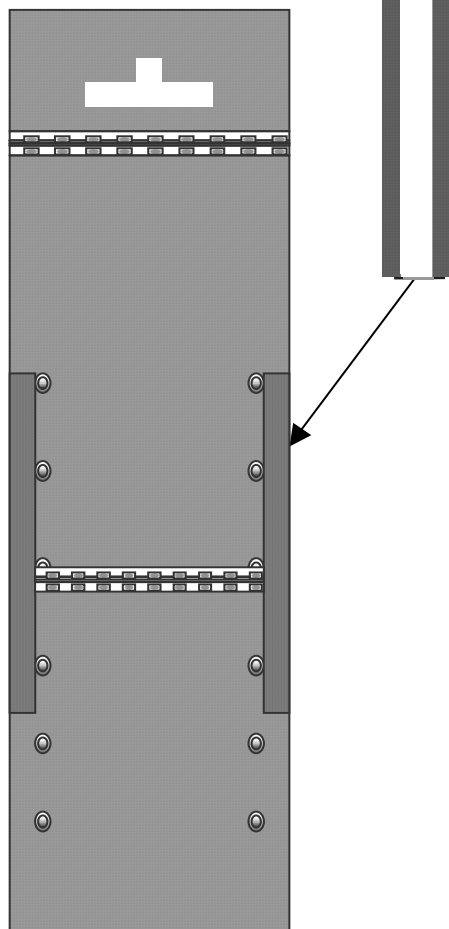

doggydocks™ Instructions

I. Attach Floatation (See Diagram)

- A. Insert the rigid foam blocks into the Snapbag™
- B. Attach Snapbag™ to snaps on back of board.
- C. Adjust position depending on the weight of your dog
- D. For dogs 10-30 lbs position bag in the middle of the board
- E. For dogs 65-80 lbs position 3"-4" from the board end (opposite of the cleat hole.)

Note:

The center of gravity for dogs differs greatly. Before letting your dog use the dock, make sure that the end of the dock is in the water at an angle that is easy for the dog to walk up without trying to reach with front paws, but not so steep that the ramp pushes down at an angle that is too steep for the dog to climb. Position the snapbag up or down, finding a balance point between angle of the board and water resistance.

II. Secure to Boat Dock (see FIG B1, B2, and B3):

- A. Slip the cut out on the small section of doggydocks™ over a standard size boat cleat.
- B. Push the board forward so that the hinge is directly under the edge of the dock

III. Boat Platform (see FIG A):

If your boat does not have a cleat in the center of the swim platform you will need to use other methods of attachment. Using a rope or strap to secure the doggydocks™ using the cleat cut-out on two sides and tie to the stabilizer bars (see page 5) under the platform or wrap it around and tie it off. The most important factor is to keep the doggydocks™ stable and secure.

PupGear™ IMPORTANT INFORMATION

PupGear, their Dealers, Retailers or Distributors are not responsible for any use or misuse of the product other than its stated and intended use.

This product is intended to be used by dogs as an access in and out of water.

Caution:

**Never leave your dog
Unsupervised in or around water.**

doggydocks™ are not intended for use by humans, livestock or others.

doggydocks™ are not intended as personal floatation device or a life saving device for your dog.

This product should always be used under adult supervision.


Pupgear strongly recommends that the doggydocks™ be removed from the water when not in use.

The First Time Your Dog Uses doggydocks™

Most dogs know instinctively how to use the doggydocks™. Before allowing your dog to use it, make sure that it is adjusted and positioned properly. The first time the dog swims back to the dock to climb out of the water, make sure you have a way to pull the dog up the ramp if it is too steep. Use a long leash or rope and only help if the ramp is too steep. In the event that the floatation is too resistant, have a pole or long handled item available to push the ramp down to the proper angle. It is important that a dog's first experience using the doggydocks is a successful one.

**Please follow the installation instructions carefully
for safe use and maximum enjoyment!**




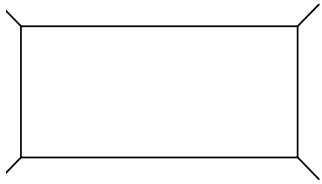

Place Foam in Snapbag™

To adjust floatation, attach the cap on the Snapbag™ to matching studs on the back of the doggydocks™

The heavier the dog, place the bag closer to the end. The Snapbag™ can also be used for adjusting steepness between top of dock and top of water.

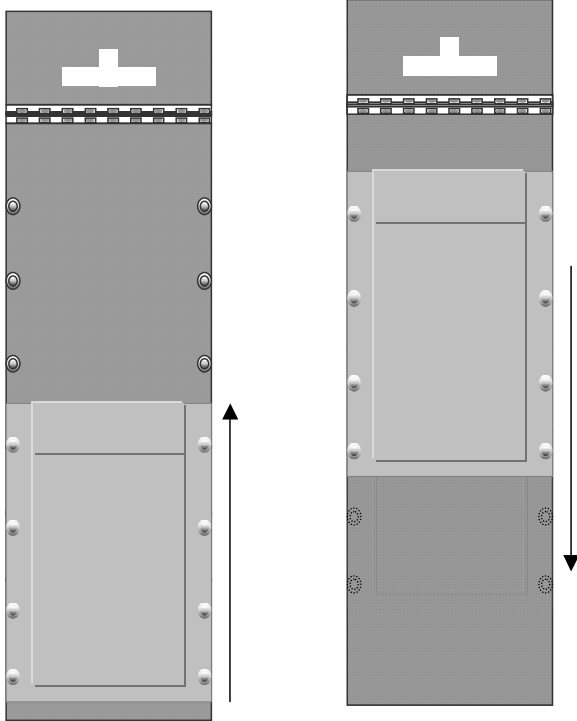

ATTACHMENT

FIG A:
Securing to boat platform or Swim Board

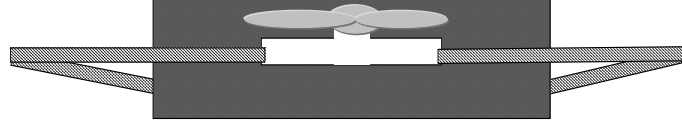


FIG B2
Using shims or wedges
Use wood or plastic


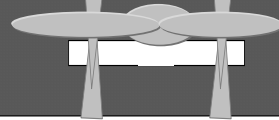


FIG B1:
Securing With Screws
Screw directly into cleat board into wood dock ledger board.

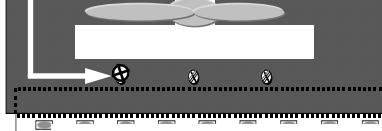


Note:
Make sure hinge does not block screw


doggydocks™

Determine Snapbag Floatation Placement


1. **Correct angle**

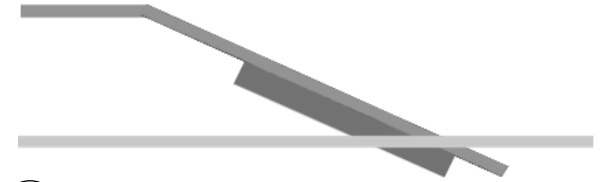

2. **Too high**

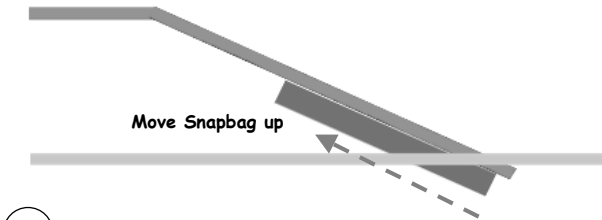

3. **Too Low**

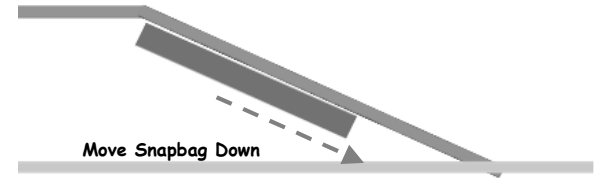

4

Optional Floatation Buoy



For Questions or Technical Assistance Contact Us At

mailto:tm@doggydocks.com

http://www.doggydocks.com

Or call 408-358-1114

For product support on the weekends we are available by cell phone 408-373-2277

I. Attach Floatation (See Diagram)

- A. Insert the rigid foam blocks into the Snapbag™
- B. Attach Snapbag™ to snaps on back of board.
- C. Adjust position depending on the weight of your dog
- D. For dogs 10-30 lbs position bag in the middle of the board
- E. For dogs 65-80 lbs position 3"-4" from the board end (opposite of the cleat hole.)