License Plate Light Kit [Part #220]

Parts Included: Please check to make sure all parts arrived with your kit.

- (1) WCC9210A License Plate Bracket
- (1) WCC9210D License Plate Light
- (4) 1/4-20 x 1" Hex Bolt
- (2) 1/4-20 Lock Nut
- (8) Plastic Washer
- (2) 1/4 Lock Washer

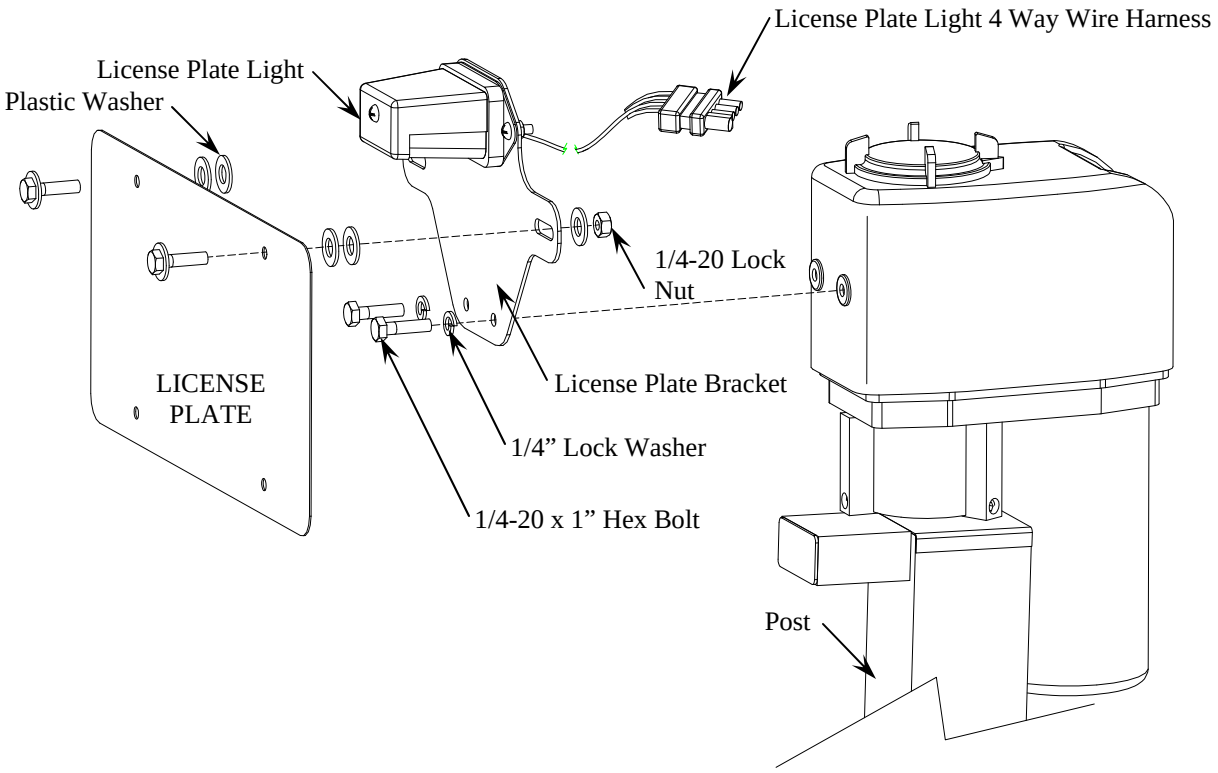

Installation:

1. Install License Plate Bracket to the motor using the 1/4-20 x 1 Hex Bolts and Lock Washers.
2. Attach the License Plate to the Bracket using the 1/4-20 x 1 Hex Bolts and Plastic Washers as shown.
3. Route the License Plate 4 Way harness down the Post and to its mating 4 way connector near the hitch opening. If a Swing Away option is installed, the wire will need to be routed along the swing away, making sure the swing away can open without damaging the wire and also making sure the wire is not located next to the exhaust. Secure the wire harness to the post and swing away.

Wiring:

The License Plate 4 Way Wire harness may be plugged into the standard 4 way wiring from the vehicle in order to operate the license plate light when the vehicles head lights are on. If the vehicle does not have a 4 way connector then one must be installed.

WheelChair Carrier
203 Matzinger Road
Toledo, OH 43612
Phone: 800-541-3213
Fax: (419) 478-4425
www.WheelChairCarrier.com
E-mail: Admin@wheelchaircarrier.com

Rev C 10-09

DISCLAIMER:

Please note that this option is to be installed by qualified persons only. All connections must be crimped. Wheelchair Carrier is not responsible for faulty wiring or installation that causes damage to the vehicle or to the equipment.