

INSTRUCTIONS

501BR – Ladder Mounted Bike Rack


PLEASE NOTE THE FOLLOWING SAFETY POINTS:

1. The ladder MUST be in good condition to use the bike rack.
2. The rear axle of the bike must be centered on the rack.
3. Make sure to tighten the strap around the tires as much as possible.
4. When the bike are mounted the front wheel should NOT hang below the bumper. Tire should be at or above the bumper to avoid the bikes being dragged.

INSTALLATION INSTRUCTIONS

Bike rack should be mounted as close as possible to the center stantion on the ladder.

Place part A on the front of the ladder and part B in the back of the ladder and screw them back together. Repeat the same for the bottom half of the rack.

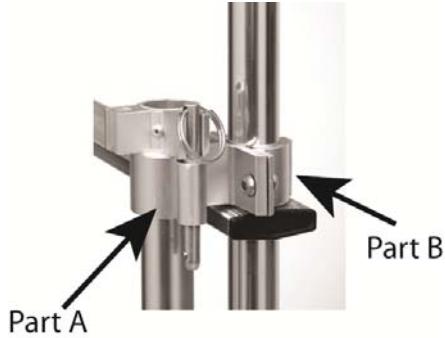

Once one side is mounted and tightened properly repeat the same steps to the other half of the rack.



Remove pins to swing open the rack to allow easier access to the ladder. Replace the pin to hold open the rack. Once done remove the pins close the rack and reinsert the pins. **PLEASE NOTE THE PINS MUST ALWAYS BE IN PLACE REGARDLESS OF WHETHER THE RACK IS IN THE OPEN OR CLOSED POSITION.**

MOUNTING THE BIKES ONTO THE RACK

Undo the strap on the cradles. Load the first bike onto the bike rack making sure the vertical bar closest to the rear wheel is centered on the cradle. Once centered tighten the straps around the bike as tight as possible.

NOTE: Front wheel should be facing down. Make sure no part of the bike (ie. seat) does not extend past the rear view mirror.

Repeat the above steps and mount the second bike in the opposite direction..