


ATV CABIN COVER ASSEMBLY AND CARE INSTRUCTIONS

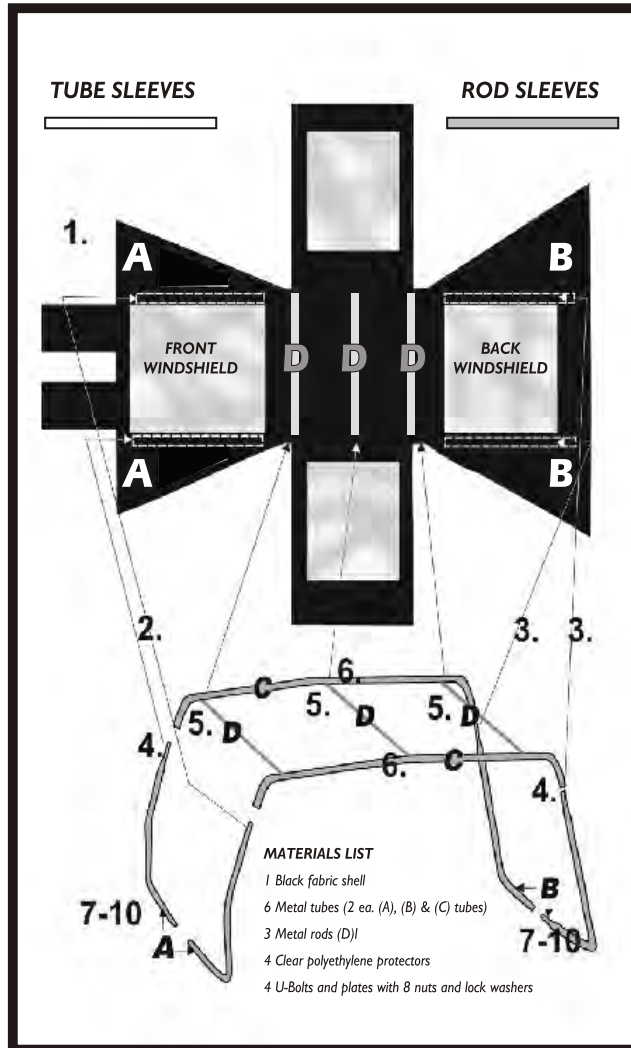

To Assemble:

1. Spread the fabric shell on the ground with the outside part facing down.
2. Slip the longer end of the tubes marked (A) into the fabric sleeves on either side of the front windshield. The shorter portions should face each other, pointing to the centre of the fabric shell. Now join the two (A) tubes together at the bottom by pushing the crimped end of one (A) tube into the open end of the other (A) tube.
3. Slide the larger portions of the two "L" shaped (B) tubes into the fabric sleeves labeled (B) along the back window, with the shorter portion facing each other and then join the two (B) tubes together of the bottom.
4. Insert the ends of the two (A) tubes and (B) tubes into the two (C) tubes, along the sides. Make sure that the three holes in each (C) tube face in towards the center of the fabric shell. This will start to give shape to the ATV cabin cover.
5. Insert the three roof rods (D) into the three cross way fabric sleeves (D) between the front and back windshield and insert the ends of the roof rods into the holes in the (C) tubes.
6. Along the length of each roof tube (C) there are 3 hook-and-loop straps to secure the fabric roof to the frame. Pull each of the hook-and-loop straps around tube (C) and attach to the corresponding tab on the other side of the tube.
7. Secure the fabric cover to the frame bottom with the four hook-and-loop straps along the front and back.

Installation:

8. Locate the four clear polyethylene protectors. Slip one protector onto the bottom of each of the (A) and (B) tubes so that there are two protectors on both the front and back
9. Gently lift your assembled ATV Cabin onto your ATV so that it rests on your front and rear luggage racks. Your ATV Cabin will usually be large enough to enclose one of your luggage racks. Reposition the clear polyethylene protectors so that they are between your luggage rack and the ATV Cabin frame.

10. Use the four U-bolts and plates and the eight nuts and lock washers to secure the ATV Cabin frame to both luggage racks.

Care and Use:

You can roll up the two doors by securing them with the two snap straps at the top of each door. Don't roll up the doors in temperatures below freezing as the vinyl windows could crack.

Your ATV Cabin can be cleaned with warm water and a SOFT cloth. DO NOT USE SOAP OR ANYTHING ABRASIVE WHEN CLEANING THE CLEAR VINYL. This may scratch the vinyl windows.

Warranty:

This ATV Cabin is factory warranted for workmanship and materials for 1 year after your purchase. This warranty assumes normal use and conditions and does not include chemical damage to the cover, collisions, window scratches, or misuse. Not for use at speeds over 40 KPH.

