



Ceiling Mount Bicycle Hoist Instructions for Part # BL-71122






General Guidelines

- It is the user's responsibility to read and follow all instructions.
- Keep these instructions with the product at all times and review before each use.
- It is the responsibility of this product's owner to furnish the instructions to any person that borrows or purchases the product.
- Inspect the product before use to ensure it is assembled properly and all parts are in safe working order and free of defects.
- Never modify this product in any way.
- All circumstances cannot be addressed in these instructions. Please use common sense and practice general safety measures when using this product.
- Parts and/or instructions are subject to change without notice.

Safety

- This hoist is designed to safely hold one bicycle.
- The weight capacity is 50 lbs.
- Remove any extra objects from the bicycle before storage that may increase the weight to be above the hoist's capacity rating or that could fall off the bicycle.
- Installation requires a suitable location with solid wood ceiling joists at least 2" x 4" or larger, with enough room to fit the bicycle being stored. An extra 6" of clearance on each end of the bicycle is recommended.
- Use a stud finder to locate joists beyond drywall.
- The manufacturer is not responsible for damage from improper installation or use.

Parts

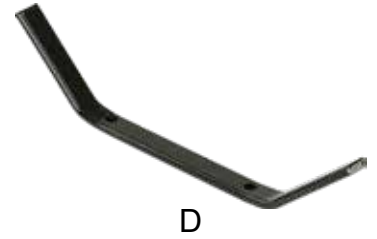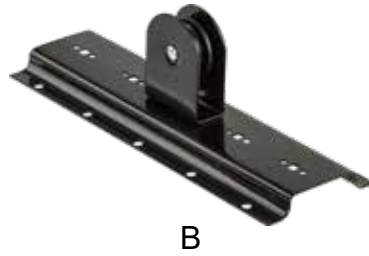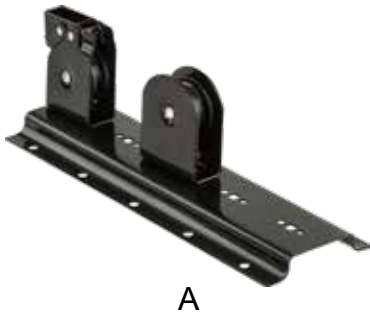

Part	Description	Quantity
A	Pulley with Lock	1
B	Pulley	1
C	Pulley Hook	2
D	Tie Off Bar	1
E	Hoist Rope	1
F	Mounting Screw	10

Tools Required

- Phillips screwdriver
- Measuring tape


Mounting

For best results, mount the lift assemblies so the hooks are directly above the seat and handlebar. If you wish, you can mount the entire assembly to a board, then mount the board to ceiling joists.


Step 1. Measure the distance between the handlebars and the back of the seat. This is where the hooks will attach to the bike. These measurements will be transferred to the ceiling or a board.



Step 2. Locate a ceiling joist. If your ceiling is covered with drywall, look for nail props, irregularities, and fixtures as clues to locating a joist. Use a stud finder to ensure you have located a joist. Once a joist is located, measure from the wall to the joist. Transfer your seat/handlebar measurement along the joist so the lift attachments line up. If you are planning to mount the lift assemblies in the opposite direction of the joists, you will need to mount the lift assemblies to a board and attach the board to two joists.

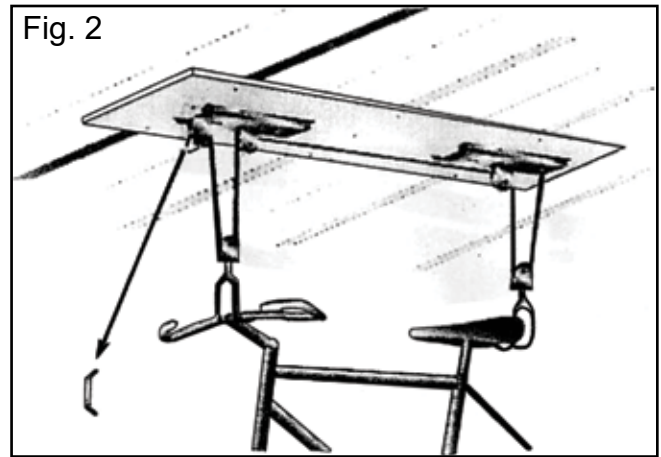

Step 3. Tie a double knot on the hoist rope end. Feed the rest of the rope through the square hole on the lift assembly. Continue threading the rope through the lift assembly pulleys and hook assembly pulleys as shown.

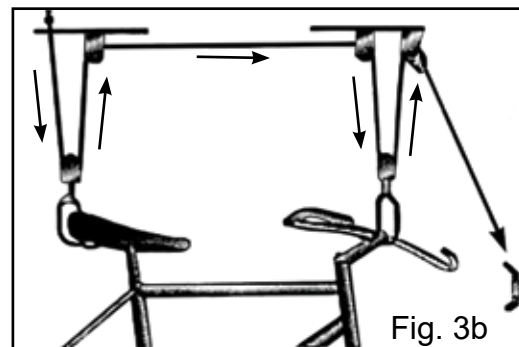

Step 4. Using the wood screws provided, mount each of the lift assemblies (three screws each) to the ceiling, ensuring the hooks line up with your handlebar/seat measurements.

Step 5. Use the remaining two wood screws to mount the rope cleat to the wall. Again, you will need to find a stud to mount the cleat. Use wall anchors if mounting into a hollow surface. Wall anchors can be found at most hardware stores and home centers. Do not cut the rope. Use the cleat for excess.

Using the Bike Hoist

Lower the hooks over the bike handlebars and seat. Ensure the ropes are not twisted. Lift the bike onto the hooks. The bike can then be raised to the ceiling by pulling the rope. Anytime the rope is released, the rope lock will engage, preventing the bike from falling. For safety, tie off the rope on the cleat and wind the excess rope around it.

Lowering Your Bike

Pull the rope towards the back pulley, maintaining tension on the rope. Slowly let the rope out as the bike lowers. Letting the rope out too fast will engage the rope lock. When the bike is down, remove it from the hooks and raise the hooks to the ceiling. Store excess rope around the rope cleat.

Product Warranty and Liability

GENERAL PRODUCT WARRANTY: Products purchased from the Authorized Dealer (original place of purchase) or Merchant (“Dealer”) will be free of defects in material and workmanship at the time of receipt, and will meet the specifications stated at the place of purchase transaction or online at the Dealer’s website, under normal use and service when correctly installed, operated and maintained. This product warranty is effective for the period of time stated below, unless otherwise stated in the product instructions or depicted in the product advertisement. **All Authorized Dealer warranties are NON-TRANSFERABLE** and cover only the original end purchaser. This limited warranty does not cover products purchased through non-authorized dealers. Non-authorized dealer receipts are not accepted for warranty verification.

*****Warranty claims must be made directly to the original place of purchase.*****

WARRANTY PERIOD: This warranty remains in force for one year from the date of the product’s accepted delivery. The Authorized Dealer offers a one year manufacturer’s warranty for most products unless otherwise specified on the product advertisement.

WARRANTY SERVICE: The Authorized Dealer will replace any defective or malfunctioning part at no charge, including payment of the shipping costs of parts or replacement product to and from the manufacturer. The purchaser is responsible for labor charges. If the product does not meet specifications as depicted in the advertisement, the Authorized Dealer will refund the full purchase price of the product.

Questions regarding the warranty on a specific product and warranty claims should be directed to the Authorized Dealer with whom the purchase transaction was made.

WARRANTY LIMITATIONS: The above warranty does not apply to products that are repaired, modified or altered by any party other than the Authorized Dealer; are subjected to unusual physical stress or conditions (such as overloaded ramps or corrosion), natural disaster, governmental actions, wars, strikes, labor disputes, riots, theft, vandalism, terrorism or any reason beyond reasonable control; are damaged due to improper installation, misuse, abuse, accident or negligence in use, storage, transportation or handling, or tampering; or to products that are considered consumable items or items requiring repair or replacement due to normal wear and tear.

Product should be inspected prior to signing for delivery. Product damage incurred during shipping, unless noted on the Bill of Lading at the time of delivery, renders this warranty void.

LIMITED LIABILITY: In no event shall THE AUTHORIZED DEALER be liable to the purchaser or any third party for any indirect, incidental, consequential, special, exemplary or punitive damages arising out of the use of the product, including, without limitation, property damage, loss of value of the product or any third party products that are used in or with the product, or loss of use of the product or any third party products that are used in or with the product.

