



BLUFF
MANUFACTURING, INC.

Date: _____ Phone: _____

Company: _____

Name: _____

Lo-Dock / Door Seal Worksheet & Questionnaire

IMPORTANT: Pallet Jacks are not recommended for use with Edge of Dock Levelers, however in some cases they may be used to accommodate 3" above dock and 3" below dock applications.


NOTE: To achieve a +/-5" function range we recommend the use of a gas or propane lift.



Lo-Dock

GENERAL INFORMATION:

1. Are you interested in: (check one)
_____ Lo-Dock Unit or _____ Door Seal Unit
2. What is the dock height? _____ in.
3. What is the truck height? _____ Min. _____ Max.
4. When the truck is in position to be serviced, how much taller does the dock need to be (what height Lo-Dock do you need)? _____
5. What is the lift capacity of the forklift? _____ lbs.
6. Is the forklift electric, gasoline or propane? _____
7. Does the forklift have 3 wheels or 4 wheels? _____
8. How many shifts per day will be using this equipment? _____
9. Will this location service refrigerated trailers? _____

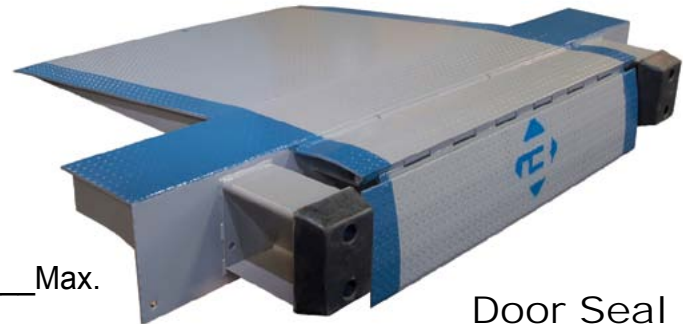

Door Seal


NOTE: The face of the dock should be free of any projections or dock bumpers before the installation process begins.

PLEASE COMPLETE PAGE 2 OF THIS WORKSHEET

SERVICE YOU CAN STAND ON

(800) 433-2212 • www.bluffmanufacturing.com • Fax (817) 293-7570
1400 Everman Parkway • Suite 156 • Fort Worth, Texas 76140

LO-DOCK & DOOR SEAL APPLICATIONS

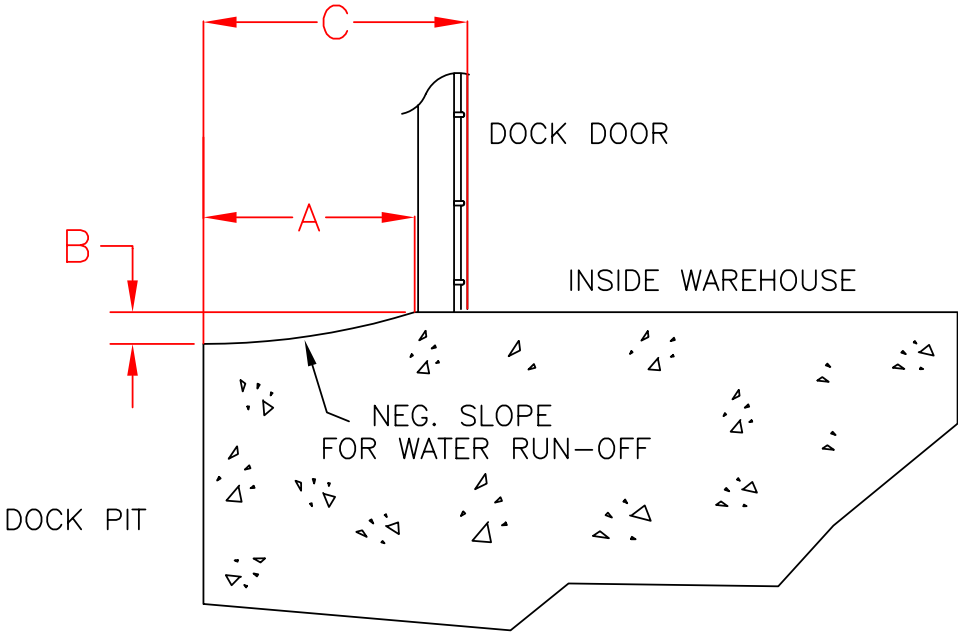

DIM. A _____ in.
DIM. B _____ in.
DIM. C _____ in.

WHAT IS THE NARROWEST PART OF THE DOOR OPENING? _____

****IMPORTANT:** Bluff recommends safety run-off curbs on all Lo-Dock and Door Seal products 6 inches and above.