



Please Read First

Moto Pro HQ LLC. Takes great pride in building and distributing great products.

MADE IN THE USA!

Transporting or carrying a motorcycle can be very dangerous. USE EXTREME CAUTION while loading, transporting, carrying and unloading motorcycles. With all automotive accessories there is potential for damage to your vehicle and or motorcycle. By using products you assume all risks. MotoPro HQ LLC is not responsible for damage to vehicles, trailers, campers or motorcycles, as the direct or indirect use of the system. If you are experiencing a problem or notice something that you do not think is correct during the installation or use, stop using the product immediately and call MotoPro HQ LLC at 515.402.0883. Read and follow the installation instructions and loading instructions.

Intended use: Each system is designed for use in truck beds, utility trailers, enclosed trailers, toy haulers, and vans that are equipped with cargo securing systems. The track system shall be secured to the vehicle and checked before each use. It is the buyer/customer responsibility to purchase and securely install. When installed correctly, stabilize the front wheel of most motorcycle tires up to 6" in width. Extreme caution should be taken to make sure the motorcycle is secured properly with tiedown straps or similar methods to verify secure anchor points. We recommend using heavy duty "D-ring" style or similar anchors.

Please read, understand, and follow all warnings and installation instructions. If something doesn't fit, or you think it doesn't fit, STOP. Do not install the system if a part is damaged, bent, or cracked during shipping, STOP. Call MotoProHQ customer service at 515.402.0883. Inspect the product and your E-Track, before each use for any signs of damage, stress cracks, bends, or improper fit. While we believe the system is built to a very high standard, it is an accessory that will experience normal wear with use.

MotoPro HQ LLC warrants to the original purchaser only that the product will be free from material defects in both materials and workmanship, under normal use and service with proper maintenance, for a period of 1 year (365 days) from the date of original purchase. The foregoing warranty is valid only if the installation and use of the product is strictly in accordance with the product instructions. There are no other warranties, expressed or implied. If any MotoPro HQ product is proven to not conform with this warranty during the applicable warranty period, please contact MotoPro HQ LLC customer service. MotoPro HQ shall, at its exclusive option, either repair or replace the MotoPro HQ product or refund the purchase price.

This limited warranty does not cover: (a) normal wear and tear (b) damage through abuse, neglect, misuse, or as a result of any accident or in any other manner (c) damage from misapplication, overloading, or improper installation; or (d) product alteration in any manner by anyone other than MotoPro HQ LLC.

Except for the foregoing limited warranty, neither MotoPro HQ, nor any person on MotoPro HQ's behalf has made or makes any express or implied representation or warranty whatsoever; including any warranties of: (i) merchantability; (ii) fitness for particular purpose; (iii) title; or (iv) non-infringement; whether arising by law, course of dealing, course of performance, usage of trade or otherwise, all of which are expressly disclaimed. In no event: (A) is MotoPro HQ or any MotoPro HQ representative liable for consequential, indirect, incidental, special, exemplary, punitive, or enhanced damages, lost profits or revenues, or diminution in value, arising out of or relating to the sale of this product, regardless of whether the damages were foreseeable, whether or not MotoPro HQ was advised of the possibility of the damages; and the legal or equitable theory (contract, tort, or otherwise) on which the claim is based; or (B) shall MotoPro HQ's aggregate liability arising out of or related to this agreement, whether arising out of or related to breach of contract, tort (including negligence), or otherwise, exceed the purchase price paid for the product.

Assumption of Risk: You acknowledge and agree that any use of the product for any purpose other than the specified use(s) stated in the product instructions is at your own risk.

Please send any feedback, comments, and pictures to: jim@motoprohq.com

The MotoPro HQ Team

MotoPro HQ LLC - PO Box 10 Runnells, IA 50237 - 515.402.0883

00.1262021.00

MotoProHQ.com

Installation for E-track 'EZ-Chock'

Step 1 – Inventory

Unpack the box and lay the components on a carpet or non-abrasive flat surface.

Kit Includes:


- Chock
- Track clip plate per chock
- Angle bracket per chock
- Hardware pack per chock
- 2 - tiedown loops per chock



Step 2 – Chock Assembly

- Determine your desired configuration:
 - 45° right angle
 - 45° left angle
 - 90° center without the angle
- For a 45° angle, bolt the angle on the clip plate for the desired direction (see picture below).

***Tip** – Start the nut on the thread and tighten without pushing the screw through. Use the open end of the wrench.

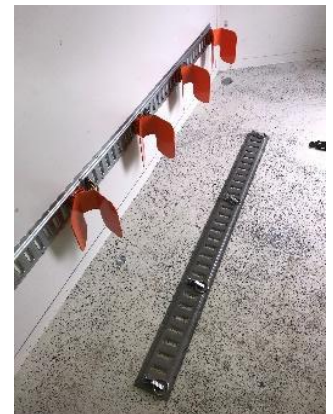

Step 3 – Install E-Track into your rig

- Locate and mark structural framing members (vertical bracing) or secure backing
- Determine your desired bike/chock locations
- For most 21" front wheels, position the track at the ideal height of 14.5" on center
- Secure the track to your trailer. We use self-tapping screws appropriately sized for track holes.

NOTE: Have a 50 or 65 bike? We sell a drop plate for smaller bikes, which will lower the EZ chock from the track.

Step 4 – Clip in your EZ-Chocks

- Determine your desired bike locations
- Pull the lever back and clip the chock(s) into place
- Clip tie-down loops a minimum 6-8 spaces left and right from your EZ-Chock

NOTE: It's normal to have a little play in the EZ-Chock once clipped into the track
This is a characteristic of E-Track, NOT the EZ-Chock

TIP: For easy and secure tie-down locations, install a length of E-track on the floor at 16-20" (preference) on center from the wall that your EZ-Chocks are mounted

You're all set!