



LOAD-A-PUP HUNTING DOG MODEL: LP500 HD

⚠ WARNING

READ ALL INSTRUCTIONS BEFORE USING THE LOAD-A-PUP HD

NOTE: Failure to read instructions before use could result in injury or death.

NOTE: All initial installation adjustments to the LOAD-A-PUP HD should be made prior to launching boat.

Instructions for Installation and Use:

Contents:

- 1-Safety Strap
- 2-J-bolts
- 2- 5/16" Wing knobs
- 2-Quick-clip pins
- 2-Leveling tubes
- 1-Load-A-Pup HD (fully assembled)

Step 1. Select side of transom (or side of boat) to mount Load-a-Pup HD.

Step 2. Insert J-bolt through vertical square tube of frame to determine desired height of Load-a-Pup HD. (Usually, this would be done to position platform at or just below water level)
SEE FIG. 1



FIG. 1

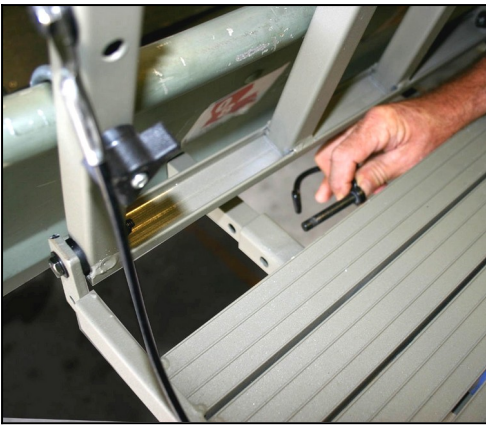


FIG. 2

Step 3. Insert Leveling Tubes Into Platform & Quick Pin Into Position To Hold Platform At Desired Angle. **SEE FIG. 2**

Step 4. Install safety strap to top of frame of the Load-a-Pup HD and connect to any available brace or hand-hold of boat to prevent accidental dropping of the Load-a-Pup HD. **SEE FIG. 3**



FIG. 3

⚠ WARNING

LOAD-A-PUP HD IS NOT DESIGNED OR APPROVED FOR HUMAN USE

⚠ WARNING

NEVER USE THIS PRODUCT FOR ANYTHING OTHER THAN INTENDED USE

⚠ WARNING

DO NOT USE THIS PRODUCT IN EXTREME WEATHER CONDITIONS i.e., LIGHTNING, HIGH WINDS, ROUGH/CHOPPY WATER

⚠ WARNING

MAXIMUM WEIGHT CAPACITY IS 200 LBS.

⚠ WARNING

MAKE SURE THAT SAFETY STRAP IS ALWAYS ATTACHED TO PREVENT PRODUCT LOSS

⚠ CAUTION

- *Do not allow dog on platform while boat is moving
- *Do not use on boats less than 14 feet in length
- *Sides of boats must be 15 inches tall or taller
 - *Do not use on a canoe or pirogue
 - *Do not use as a diving platform
 - *Do not use as hunting stand
- *Remove unit from boat before traveling

For more information about this or other products, contact us at:

Great Day, Inc.

604 Kimbrough Dr. * Tallulah, LA 71282

* (866) 649-1918 * www.greatdayinc.com