



Removable Motorcycle Wheel Chock


Instructions for Part # MC-CH-V2-35, MC-CH-V2-55, MC-CH-V2-65



General Guidelines

- It is the user's responsibility to read and follow all instructions.
- Keep these instructions with the product at all times and review before each use.
- It is the responsibility of this product's owner to furnish the instructions to any person that borrows or purchases the product.
- Inspect the product before use to ensure it is assembled properly and all parts are in safe working order and free of defects.
- Never modify this product in any way.
- All circumstances cannot be addressed in these instructions. Please use common sense and practice general safety measures when using this product.
- Parts and/or instructions are subject to change without notice.

Parts

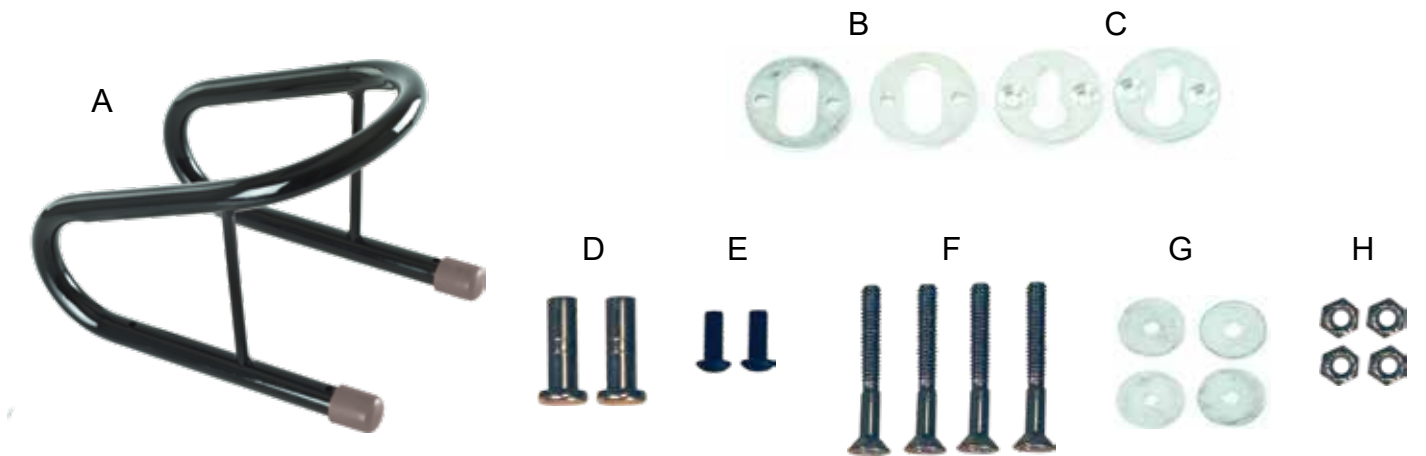


Part	Description	Quantity
A	Wheel Chock	1
B	Spacer Mounting Plates	2
C	Slotted Mounting Plates	2
D	Steel Threaded Studs	2

Part	Description	Quantity
E	1/4" x 5/8" Screws	2
F	2" Screws	4
G	Washers	4
H	Locking Nuts	4

Mounting Instructions

Step 1. With the wheel chock in an upright position, place the steel threaded studs (D), from the bottom-up, into the back holes of the chock. Secure from the top with 1/4" x 5/8" screws (E). Repeat with other stud. (See Fig. 1)

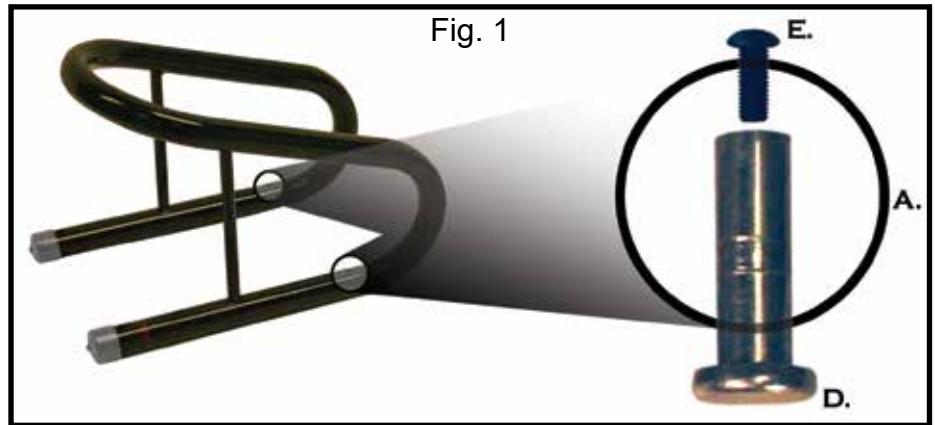


Step 2. To install mounting hardware, place the wheel chock on the floor in its appropriate position. Trace around the two threaded studs (D). Make sure the location allows enough room for the bike and securing straps.

Step 3. Find the right placement of holes by placing the mounting plates (B+C) over the marks on the floor and mark, then drill 4 holes using a 1/4" drill bit.

Step 4. Mounting Hardware Installation:

Lay the spacer plates (B) down on the deck of the truck/trailer floor followed by the slotted mounting plates (C) on top of the spacer mounting plates (B). Secure them with the 2" screws (F). Make sure the round hole on the slotted mounting plate (C) is towards the rear of the vehicle so that the chock is secured when slid forward. From underneath the floor secure the 2" screws (F) with washers (G) and lock nuts (H). Tighten screws (F) and repeat for other plates. (See Fig. 4)

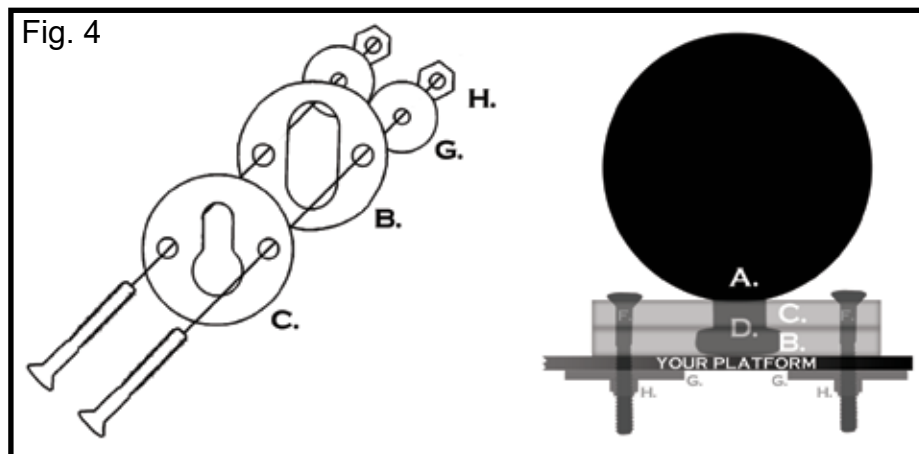

Step 5. With hardware securely in place, slide the wheel chock into the mounting plates (B & C).
*Note - The wheel chock is locked into place with the bike tire is in the chock & tie down straps pulling the bike toward the front of the trailer.

Product Warranty and Liability

GENERAL PRODUCT WARRANTY: Products purchased from the Authorized Dealer (original place of purchase) or Merchant (“Dealer”) will be free of defects in material and workmanship at the time of receipt, and will meet the specifications stated at the place of purchase transaction or online at the Dealer’s website, under normal use and service when correctly installed, operated and maintained. This product warranty is effective for the period of time stated below, unless otherwise stated in the product instructions or depicted in the product advertisement. **All Authorized Dealer warranties are NON-TRANSFERABLE** and cover only the original end purchaser. This limited warranty does not cover products purchased through non-authorized dealers. Non-authorized dealer receipts are not accepted for warranty verification.

*****Warranty claims must be made directly to the original place of purchase.*****

WARRANTY PERIOD: This warranty remains in force for one year from the date of the product’s accepted delivery. The Authorized Dealer offers a one year manufacturer’s warranty for most products unless otherwise specified on the product advertisement.

WARRANTY SERVICE: The Authorized Dealer will replace any defective or malfunctioning part at no charge, including payment of the shipping costs of parts or replacement product to and from the manufacturer. The purchaser is responsible for labor charges. If the product does not meet specifications as depicted in the advertisement, the Authorized Dealer will refund the full purchase price of the product.

Questions regarding the warranty on a specific product and warranty claims should be directed to the Authorized Dealer with whom the purchase transaction was made.

WARRANTY LIMITATIONS: The above warranty does not apply to products that are repaired, modified or altered by any party other than the Authorized Dealer; are subjected to unusual physical stress or conditions (such as overloaded ramps or corrosion), natural disaster, governmental actions, wars, strikes, labor disputes, riots, theft, vandalism, terrorism or any reason beyond reasonable control; are damaged due to improper installation, misuse, abuse, accident or negligence in use, storage, transportation or handling, or tampering; or to products that are considered consumable items or items requiring repair or replacement due to normal wear and tear.

Product should be inspected prior to signing for delivery. Product damage incurred during shipping, unless noted on the Bill of Lading at the time of delivery, renders this warranty void.

LIMITED LIABILITY: In no event shall THE AUTHORIZED DEALER be liable to the purchaser or any third party for any indirect, incidental, consequential, special, exemplary or punitive damages arising out of the use of the product, including, without limitation, property damage, loss of value of the product or any third party products that are used in or with the product, or loss of use of the product or any third party products that are used in or with the product.

