



Deluxe Steel Motorcycle Carrier

Instructions for Part # SMC-600R


GENERAL GUIDELINES

- It is the user's responsibility to read and follow all instructions.
- Keep these instructions with the product at all times and review before each use.
- It is the responsibility of this product's owner to furnish the instructions to any person that borrows or purchases the product.
- Inspect the product before use to ensure it is assembled properly and all parts are in safe working order and free of defects.
- Never modify this product in any way.
- All circumstances cannot be addressed in these instructions. Please use common sense and practice general safety measures when using this product.
- Parts and/or instructions are subject to change without notice.

SAFETY

- Never exceed vehicle trailer hitch tongue weight capacity or carrying capacity of your vehicle.
- Some vehicles may require air shocks or modifications to the vehicle's suspension.
- Please check your owner's manual for vehicle hauling capabilities and weight ratings.
- Never exceed 600 lb. max rated weight capacity of carrier
- Not recommended for tow-behind trailers, including 5th wheel and camping trailers, motor-homes or RVs.
- Not recommended for use with hitch adapters or extensions.
- Will not work with Class II or smaller receivers.
- Push the motorcycle up the carrier with a helper; never ride a motorcycle onto the carrier!
- Prior to transport, make sure the ramp of the carrier and the motorcycle are properly secured to the carrier.
- When not in use, store the carrier in a secure place out of the reach of children.
- Carrier must be level in hitch receiver and on level ground while loading and unloading

PARTS

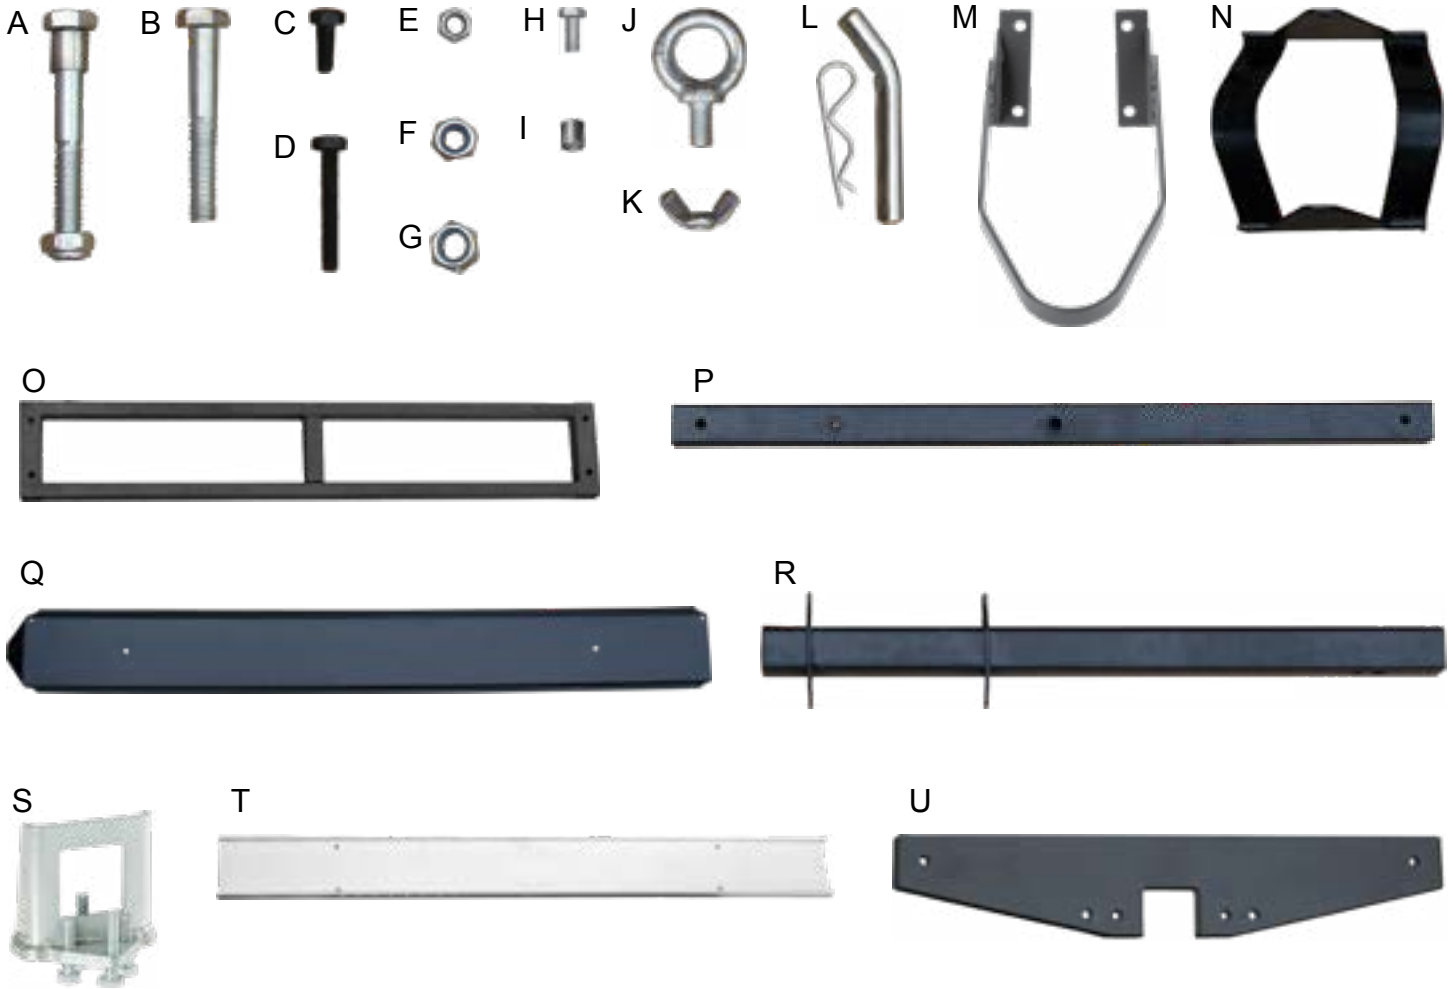


Part	Description	Quantity
A	3-1/2" Pinch Bolt & 5/8" Sleeve	1
B	3" Bolt	4
C	3/4" Bolt	8
D	2" Bolt	4
E	Lock Nuts for Bolts (C) & (D)	12
F	Lock Nuts for Loop Bolts (J)	4
G	Lock Nuts for Bolts (H) & (B)	10
H	1" Bolt	6
I	5/8" Sleeve	4
J	Tie Down Loop Bolts	4
K	Wing Nuts	2

Part	Description	Quantity
L	5/8" Hitch Pin	1
M	Front Tire Stop	1
N	Rear Cradle	1
O	Carrier Frame	1
P	Tie Down Tubes	2
Q	Loading Ramp	1
R	Main Tube	1
S	Reverse Anti-Tilt	1
T	Carrier Track	1
U	Support Bracket	2

ASSEMBLY


Step 1. Place the main hitch tube (R) on a piece of cardboard to protect the paint, then connect the support brackets (U) to the hitch tube using eight 3/4" bolts (C) and lock nuts (E), keeping bolts loose.

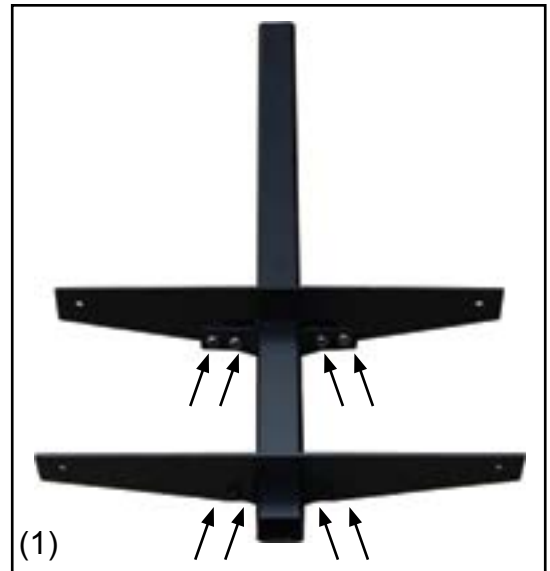

Step 2. Slide the carrier frame (O) between the support brackets (U) and secure using the 2" bolts (D) and the small lock nuts (E). Tighten ALL bolts including bolts from Step 1. Be careful not to overtighten.



Step 3. Slide the tie down tubes (P) into the carrier frame (O). Then secure the carrier track (T) to the carrier frame using 3" bolts (B), sleeves (I), and lock nuts (G) on each end. Note: Sleeves (I) are used to eliminate extra play between the carrier frame and tie down tubes.

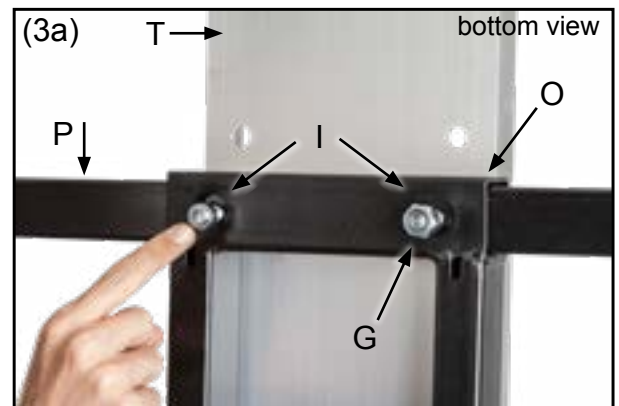

Step 4. Next connect the front tire stop and the rear cradle using six 1" bolts (H) and the larger lock nuts (G) to secure it to the carrier




Step 5. Connect the loading ramp (Q) to the tie down tubes (P) by lining up the holes with the welded bolts, then connect using the wing nuts (K). Connect the loop bolts (J) to the end of each tie down tube (P) using the lock nuts (F). Slide the anti-tilt (S) onto the main tube (R).



Step 6. From here there are two methods for stabilizing the carrier. Both methods may be used, but at least one is recommended.


1st Method - Using hitch pin (L) and reverse anti-tilt (S).

Slide the reverse anti-tilt (S) onto the main tube (R) with the single bolt pointing toward the carrier track. Slide the carrier main tube (R) into the trailer hitch, lining up the larger 5/8" hole in the main tube with the hitch pin hole. Insert the hitch pin (L) and install the hitch pin clip. Slide the reverse anti-tilt bracket (S) forward toward the vehicle hitch until it is flush against the hitch. Tighten the four bolts on the anti-tilt bracket.

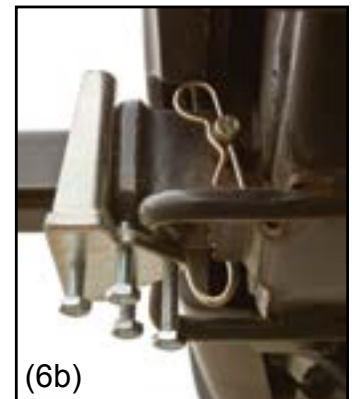

2nd Method - Using pinch bolt (A) and reverse anti-tilt bracket (S)

Slide the reverse anti-tilt (S) onto the main tube (R) with the single bolt pointing toward the carrier track. Slide the carrier main tube (R) into the trailer hitch, lining up the larger 1/2" hole in the main tube with the hitch pin hole. Slide the 3-1/2" pinch bolt (A) (with sleeve on bolt side of bolt) through the trailer hitch hole. Install the lock nut on the bolt and tighten. See diagram.

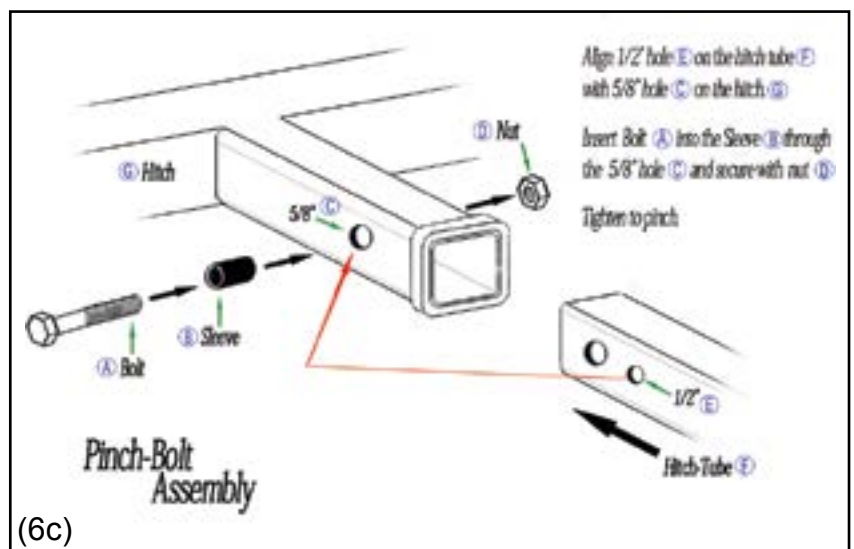

PRODUCT WARRANTY & LIABILITY

GENERAL PRODUCT WARRANTY: Products purchased from the Authorized Dealer (original place of purchase) or Merchant ("Dealer") will be free of defects in material and workmanship at the time of receipt, and will meet the specifications stated at the place of purchase transaction or online at the Dealer's website, under normal use and service when correctly installed, operated and maintained. This product warranty is effective for the period of time stated below, unless otherwise stated in the product instructions or depicted in the product advertisement. All Authorized Dealer warranties are NON-TRANSFERABLE and cover only the original end purchaser. This limited warranty does not cover products purchased through non-authorized dealers. Non-authorized dealer receipts are not accepted for warranty verification.

*****WARRANTY CLAIMS MUST BE MADE DIRECTLY TO THE ORIGINAL PLACE OF PURCHASE.*****

WARRANTY PERIOD: This warranty remains in force for one year from the date of the product's accepted delivery. The Authorized Dealer offers a one year manufacturer's warranty for most products unless otherwise specified on the product advertisement.

WARRANTY SERVICE: The Authorized Dealer will replace any defective or malfunctioning part at no charge, including payment of the shipping costs of parts or replacement product to and from the manufacturer. The purchaser is responsible for labor charges. If the product does not meet specifications as depicted in the advertisement, the Authorized Dealer will refund the full purchase price of the product.

Questions regarding the warranty on a specific product and warranty claims should be directed to the Authorized Dealer with whom the purchase transaction was made.

WARRANTY LIMITATIONS: The above warranty does not apply to products that are repaired, modified or altered by any party other than the Authorized Dealer; are subjected to unusual physical stress or conditions (such as overloaded ramps or corrosion), natural disaster, governmental actions, wars, strikes, labor disputes, riots, theft, vandalism, terrorism or any reason beyond reasonable control; are damaged due to improper installation, misuse, abuse, accident or negligence in use, storage, transportation or handling, or tampering; or to products that are considered consumable items or items requiring repair or replacement due to normal wear and tear.

Product should be inspected prior to signing for delivery. Product damage incurred during shipping, unless noted on the Bill of Lading at the time of delivery, renders this warranty void.

LIMITED LIABILITY: In no event shall **THE AUTHORIZED DEALER** be liable to the purchaser or any third party for any indirect, incidental, consequential, special, exemplary or punitive damages arising out of the use of the product, including, without limitation, property damage, loss of value of the product or any third party products that are used in or with the product, or loss of use of the product or any third party products that are used in or with the product.

